

ANK 020-150

Reversible air/water heat pump

Cooling capacity 6,8 ÷ 39,8 kW – Heating capacity 8,0 ÷ 35,3 kW

- Production of hot water up to 60 °C
- Production of hot domestic water with external temperatures from -20 °C up to 42 °C
- Compact dimensions
- Quick & easy installation



DESCRIPTION

Reversible air/water heat pump for air conditioning systems with cold water production for cooling rooms and hot water for heating and/or domestic hot water services, suitable for connection with small or medium users. It's optimised for use in heating mode, and can be combined not only with low-temperature emission systems such as floor heating or fan coils, but also conventional radiators. Equipped with scroll compressors, axial fans, external coil with aluminium louvers, plate heat exchanger on the side. The base, the structure and the panels are made of galvanized steel treated with polyester paint RAL 9003.

VERSIONS

- ° Standard
- A With storage tank and pump
- P With pump

FEATURES

Operating field

Working at full load up to -20°C outside air temperature in winter, and up to 46°C in summer. Possibility production technical hot water production up to 60°C (for more information see the technical documentation).

Soft-start

Version with Integrated hydronic kit

To have a Plug & Play solution is also available the version with the integrated Hydronic group that contains the main hydraulic components including the water filter.

Inverter fan

Inverter fans as standard in size up 020 to 085 in all versions.

■ *The DCPX accessory is not required for these sizes.*

MODUCONTROL CONTROL

The command panel of the unit allows the rapid setting of the working parameters of the machine, and their visualisation. The display consists of 4 figures and various LEDs for indicating the type of operational mode, the

visualisation of the parameters set and of any alarms triggered. The card stores all the default settings and any modifications.

ACCESSORIES

AERBAC-MODU: Ethernet communication Interface for protocols Bacnet/IP, Modbus TCP/IP, SNMP. The accessory is supplied with the unit and must be installed on an external electrical panel.

AERLINK: Wifi Gateway with an RS485 serial port that can be installed on all machines or on all controllers having an RS485 serial port themselves. The module is capable of simultaneously activating the AP WIFI (Access point) and WIFI Station functions, the latter making it possible to connect to the home or business LAN both with VMF-E5 and E6. To facilitate certain management and control operations of the unit, the AERAPP and AERPLANTS applications are available both for Android and iOS systems.

AERSET: It makes it possible to automatically compensate for the operation setting of the unit to which it is connected, based on a 0-10V MODBUS input signal. Mandatory accessory MODU-485BL.

MODU-485BL: RS-485 interface for supervision systems with MODBUS protocol.

MULTICONTROL: Allows the simultaneous control of several units (up to 4), installed in the same hydraulic system.

PR3: Simplified remote panel. This makes it possible to carry out the unit's basic controls with the signalling of alarms. Can be made remote with shielded cable up to 150 m.

SDHW: Domestic hot water sensor. To be used with a storage tank for the control of water temperature produced.

SGD: Electronic expansion that enables connecting to the photovoltaic system and heat pumps to accumulate heat in the DHW tank or in the heating system during the photovoltaic production phase and release it at times when heating demand is highest.

SPLW: System water temperature sensor. In most cases the loose supplied sensors for each chiller/heat pump are sufficient. In cases of a common flow/return header this sensor can be used to control the common system supply water temperature for the chillers connected to the header, or it can be used for temperature monitoring

VMF-CRP: Accessory module for controlling boilers, heat recovery units and pumps (if associated with VMF-E5 / RCC panels); if associated with the VMF-E6 panel, the VMF-CRP modules will be able to manage heat recovery units, RAS, boiler, sanitary management, I/O control, pumps.

DCPX: Device for condensation temperature control, with continuous speed modulation of fans by using a pressure transducer.

VT: Anti-vibration supports.

BSKW: Electric heaters kit with IP44 panel for remote mounting in a sheltered area.

KRB: Electric anti-freeze resistance kit for base.

BDX: Condensate drip with resistance

COMPATIBILITY WITH VMF SYSTEM

For more information about VMF system, refer to the dedicated documentation.

FACTORY FITTED ACCESSORIES

DRE: Electronic device for peak current reduction.

ACCESSORIES COMPATIBILITY

Model	Ver	020	030	040	045	050	085	100	150
AERBAC-MODU	°A,P
AERLINK	°A,P
AERSET	°A,P
MODU-485BL	°A,P
MULTICONTROL	°A,P
PR3	°A,P
SDHW (1)	°A,P
SGD	°A,P
SPLW (2)	°A,P
VMF-CRP	°A,P

(1) Probe required for MULTICONTROL for managing the domestic hot water system.

(2) Probe required for MULTICONTROL to manage the secondary circuit system.

Ver	020	030	040	045	050	085	100	150
°A,P	-	-	-	-	-	-	DCPX53	DCPX53

The accessory cannot be fitted on the configurations indicated with -

Ver	020	030	040	045	050	085	100	150
Power supply: °								
°A,P	BS6KW400T, BS9KW400T	BS6KW400T, BS9KW400T	BS6KW400T, BS9KW400T	BS6KW400T, BS9KW400T	BS6KW400T, BS9KW400T	BS6KW400T, BS9KW400T	BS6KW400T, BS9KW400T	BS6KW400T, BS9KW400T

Power supply: M

°A,P	BS4KW230M, BS6KW230M	BS4KW230M, BS6KW230M	BS4KW230M, BS6KW230M	-	-	-	-	-
------	-------------------------	-------------------------	-------------------------	---	---	---	---	---

Ver	020	030	040	045	050	085	100	150
°P	VT9	VT9	VT9	VT9	VT9	VT9	VT15	VT15
A	VT15A	VT15A	VT15A	VT15A	VT15A	VT15A	VT15	VT15
Power supply: °								
°A,P	DRES (1)	DRES (1)	DRES (1)	DRES (1)	DRES (1)	DRES (1)	DRES x 2 (1)	DRES x 2 (1)

(1) Only for supplies of 400V 3N ~ 50Hz and 400V 3 ~ 50Hz. x 2 or x 3 (if present) indicates the quantity to be ordered.

A grey background indicates the accessory must be assembled in the factory

Ver	020	030	040	045	050	085	100	150
°A,P	KRB1 (1)	KRB2 (1)	KRB2 (1)	KRB2 (1)	KRB2 (1)	KRB2 (1)	KRB3 (1)	KRB3 (1)

(1) Incompatible with the condensate collection basin accessory with integrated resistance.

A grey background indicates the accessory must be assembled in the factory

Ver	020	030	040	045	050	085	100	150
°A,P	BDX8	BDX9	BDX9	BDX9	BDX9	BDX9	-	-

The accessory cannot be fitted on the configurations indicated with -

A grey background indicates the accessory must be assembled in the factory

CONFIGURATOR

Field	Description
1,2,3	ANK
4,5,6	Size 020, 030, 040, 045, 050, 085, 100, 150
7	Model
H	Heat pump
8	Version
°	Standard
A	With storage tank and pump
P	With pump
9	Execution
°	Standard
10	Coils
°	Copper-aluminium
R	Copper pipes-copper fins
S	Copper pipes-Tinned copper fins
V	Copper pipes-Coated aluminium fins
11	Operating field
°	Standard mechanic thermostatic valve (1)
Y	Low temperature mechanic thermostatic valve (2)
Z	Low temperature electronic thermostatic valve (3)
12	Evaporator
°	Standard
13	Power supply
°	400V 3N ~ 50Hz (4)
M	230V ~ 50Hz (5)

- (1) Water produced up to +4 °C
 (2) Water produced from 0 °C ÷ -8 °C
 (3) Water produced from +4 °C up to +0 °C

- (4) For ANK 020 ÷ 045 sizes
 (5) Only for ANK 020 ÷ 045 sizes

PERFORMANCE SPECIFICATIONS 12 °C / 7 °C - 40 °C / 45 °C

ANK - (°) / 12/7 °C - 40/45 °C

Size		020	030	040	045	050	085	100	150
Power supply: °									
Cooling performance 12 °C / 7 °C (1)									
Cooling capacity	kW	6,8	8,2	10,5	11,6	13,1	15,5	25,3	29,3
Input power	kW	2,3	2,8	3,5	4,0	4,3	5,2	8,1	10,0
Cooling total input current	A	4,3	5,6	7,1	7,7	8,7	11,0	17,0	20,0
EER	W/W	2,93	2,91	2,98	2,93	3,03	3,00	3,12	2,92
Water flow rate system side	l/h	1169	1406	1811	1997	2253	2677	4362	5056
Pressure drop system side	kPa	16	9	16	14	18	24	32	36
Heating performance 40 °C / 45 °C (2)									
Heating capacity	kW	8,0	10,0	12,2	14,0	15,3	17,4	27,1	33,3
Input power	kW	2,5	3,1	3,8	4,2	4,4	5,0	8,3	10,5
Heating total input current	A	4,7	6,2	7,6	8,0	9,0	10,0	18,0	21,0
COP	W/W	3,21	3,24	3,25	3,38	3,48	3,46	3,24	3,19
Water flow rate system side	l/h	1376	1738	2117	2430	2656	3021	4689	5774
Pressure drop system side	kPa	22	14	22	21	25	31	37	47

- (1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C
 (2) Data EN 14511:2022; System side water heat exchanger 40 °C / 45 °C; Outside air 7 °C d.b. / 6 °C w.b.

Size		020	030	040	045	050	085	100	150
Power supply: M									
Cooling performance 12 °C / 7 °C (1)									
Cooling capacity	kW	6,8	8,2	9,6	11,7	-	-	-	-
Input power	kW	2,3	2,8	3,2	3,7	-	-	-	-
Cooling total input current	A	11,0	13,0	16,0	19,0	-	-	-	-
EER	W/W	2,92	2,91	2,97	3,16	-	-	-	-
Water flow rate system side	l/h	1179	1406	1649	2018	-	-	-	-
Pressure drop system side	kPa	16	9	14	14	-	-	-	-
Heating performance 40 °C / 45 °C (2)									
Heating capacity	kW	8,0	10,0	10,9	13,5	-	-	-	-
Input power	kW	2,5	3,1	3,4	3,8	-	-	-	-
Heating total input current	A	12,0	15,0	17,0	19,0	-	-	-	-
COP	W/W	3,16	3,24	3,15	3,50	-	-	-	-
Water flow rate system side	l/h	1376	1738	1881	2332	-	-	-	-
Pressure drop system side	kPa	22	14	18	19	-	-	-	-

- (1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C
 (2) Data EN 14511:2022; System side water heat exchanger 40 °C / 45 °C; Outside air 7 °C d.b. / 6 °C w.b.

ANK - (A/P) / 12/7 °C - 40/45 °C

Size		020	030	040	045	050	085	100	150
Power supply: °									
Cooling performance 12 °C / 7 °C (1)									
Cooling capacity	kW	6,9	8,2	10,6	11,7	13,2	15,7	25,6	29,7
Input power	kW	2,3	2,8	3,5	4,0	4,3	5,2	8,2	10,4
Cooling total input current	A	4,6	6,0	7,5	8,3	9,3	11,0	18,0	22,0
EER	W/W	3,00	2,97	3,05	2,95	3,06	3,03	3,12	2,87
Water flow rate system side	l/h	1169	1406	1811	1997	2253	2677	4362	5056
Useful head system side	kPa	78	82	70	81	74	63	115	144
Heating performance 40 °C / 45 °C (2)									
Heating capacity	kW	7,9	9,9	12,1	13,9	15,2	17,3	26,8	33,0
Input power	kW	2,4	3,0	3,7	4,2	4,4	5,0	8,4	10,8
Heating total input current	A	5,0	6,6	8,0	8,6	9,6	11,0	19,0	23,0
COP	W/W	3,22	3,26	3,27	3,35	3,46	3,44	3,18	3,05
Water flow rate system side	l/h	1376	1738	2117	2430	2656	3021	4689	5774
Useful head system side	kPa	72	76	61	68	59	50	105	109

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

(2) Data EN 14511:2022; System side water heat exchanger 40 °C / 45 °C; Outside air 7 °C d.b. / 6 °C w.b.

Size		020	030	040	045	050	085	100	150
Power supply: M									
Cooling performance 12 °C / 7 °C (1)									
Cooling capacity	kW	6,9	8,2	9,7	11,8	-	-	-	-
Input power	kW	2,3	2,8	3,2	3,7	-	-	-	-
Cooling total input current	A	12,0	14,0	16,0	20,0	-	-	-	-
EER	W/W	2,99	2,96	3,02	3,17	-	-	-	-
Water flow rate system side	l/h	1179	1406	1649	2018	-	-	-	-
Useful head system side	kPa	78	71	62	70	-	-	-	-
Heating performance 40 °C / 45 °C (2)									
Heating capacity	kW	7,9	9,9	10,8	13,4	-	-	-	-
Input power	kW	2,5	3,1	3,4	3,9	-	-	-	-
Heating total input current	A	13,0	15,0	18,0	20,0	-	-	-	-
COP	W/W	3,17	3,25	3,16	3,45	-	-	-	-
Water flow rate system side	l/h	1376	1738	1881	2332	-	-	-	-
Useful head system side	kPa	72	58	52	57	-	-	-	-

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

(2) Data EN 14511:2022; System side water heat exchanger 40 °C / 45 °C; Outside air 7 °C d.b. / 6 °C w.b.

PERFORMANCE SPECIFICATIONS 23 °C / 18 °C - 30 °C / 35 °C
ANK - (°) / 23/18 °C - 30/35 °C

Size		020	030	040	045	050	085	100	150
Power supply: °									
Cooling performance 23 °C / 18 °C (1)									
Cooling capacity	kW	9,5	11,4	14,7	16,2	18,2	21,7	34,0	39,4
Input power	kW	2,4	2,9	3,7	4,2	4,5	5,5	8,8	10,9
Cooling total input current	A	4,5	5,8	7,4	8,0	9,1	11,0	18,0	22,0
EER	W/W	3,88	3,86	3,95	3,89	4,02	3,96	3,86	3,61
Water flow rate system side	l/h	1637	1969	2536	2797	3155	3749	5889	6826
Pressure drop system side	kPa	31	18	31	27	35	47	58	66
Heating performance 30 °C / 35 °C (2)									
Heating capacity	kW	8,5	10,6	13,0	14,6	16,2	18,2	29,2	35,6
Input power	kW	2,1	2,6	3,1	3,5	3,8	4,3	6,9	8,8
Heating total input current	A	4,0	5,2	6,2	6,8	7,7	8,9	15,0	18,0
COP	W/W	4,03	4,04	4,20	4,15	4,31	4,18	4,21	4,07
Water flow rate system side	l/h	1473	1830	2253	2525	2799	3137	5041	6147
Pressure drop system side	kPa	25	15	25	22	28	33	43	53

(1) Data EN 14511:2022; System side water heat exchanger 23 °C / 18 °C; External air 35 °C

(2) Data EN 14511:2022; System side water heat exchanger 30 °C / 35 °C; External air 7 °C d.b. / 6 °C w.b.

Size		020	030	040	045	050	085	100	150
Power supply: M									
Cooling performance 23 °C / 18 °C (1)									
Cooling capacity	kW	9,5	11,4	13,3	16,3	-	-	-	-
Input power	kW	2,5	2,9	3,4	3,9	-	-	-	-
Cooling total input current	A	12,0	14,0	17,0	19,0	-	-	-	-
EER	W/W	3,86	3,86	3,94	4,19	-	-	-	-
Water flow rate system side	l/h	1652	1969	2310	2826	-	-	-	-
Pressure drop system side	kPa	31	18	27	27	-	-	-	-
Heating performance 30 °C / 35 °C (2)									
Heating capacity	kW	8,5	10,6	11,6	14,0	-	-	-	-
Input power	kW	2,2	2,6	2,8	3,3	-	-	-	-
Heating total input current	A	10,0	12,0	14,0	16,0	-	-	-	-
COP	W/W	3,96	4,04	4,08	4,30	-	-	-	-
Water flow rate system side	l/h	1473	1830	2001	2424	-	-	-	-
Pressure drop system side	kPa	25	15	21	20	-	-	-	-

(1) Data EN 14511:2022; System side water heat exchanger 23 °C / 18 °C; External air 35 °C

(2) Data EN 14511:2022; System side water heat exchanger 30 °C / 35 °C; External air 7 °C d.b. / 6 °C w.b.

ANK - (A/P) / 23/18 °C - 30/35 °C

Size		020	030	040	045	050	085	100	150
Power supply: °									
Cooling performance 23 °C / 18 °C (1)									
Cooling capacity	kW	9,5	11,5	14,8	16,3	18,4	21,8	34,3	39,8
Input power	kW	2,4	2,9	3,6	4,2	4,5	5,5	8,9	11,4
Cooling total input current	A	5,1	6,5	8,1	9,2	10,0	12,0	19,0	24,0
EER	W/W	4,00	3,98	4,06	3,92	4,05	3,99	3,85	3,48
Water flow rate system side	l/h	1637	1969	2536	2797	3155	3749	5889	6826
Useful head system side	kPa	62	70	45	55	38	16	66	51
Heating performance 30 °C / 35 °C (2)									
Heating capacity	kW	8,4	10,5	12,9	14,5	16,1	18,0	28,9	35,3
Input power	kW	2,1	2,6	3,0	3,5	3,8	4,3	7,0	9,2
Heating total input current	A	4,6	5,9	6,9	7,9	8,8	10,0	16,0	20,0
COP	W/W	4,07	4,08	4,26	4,12	4,28	4,16	4,11	3,85
Water flow rate system side	l/h	1473	1830	2253	2525	2799	3137	5041	6147
Useful head system side	kPa	69	73	56	65	54	45	95	90

(1) Data EN 14511:2022; System side water heat exchanger 23 °C / 18 °C; External air 35 °C

(2) Data EN 14511:2022; System side water heat exchanger 30 °C / 35 °C; External air 7 °C d.b. / 6 °C w.b.

Size		020	030	040	045	050	085	100	150
Power supply: M									
Cooling performance 23 °C / 18 °C (1)									
Cooling capacity	kW	9,6	11,5	13,4	16,4	-	-	-	-
Input power	kW	2,4	2,9	3,4	3,9	-	-	-	-
Cooling total input current	A	12,0	14,0	17,0	20,0	-	-	-	-
EER	W/W	3,99	3,93	4,00	4,18	-	-	-	-
Water flow rate system side	l/h	1652	1969	2310	2826	-	-	-	-
Useful head system side	kPa	62	47	29	32	-	-	-	-
Heating performance 30 °C / 35 °C (2)									
Heating capacity	kW	8,6	10,8	11,9	13,8	-	-	-	-
Input power	kW	2,2	2,6	2,9	3,4	-	-	-	-
Heating total input current	A	11,0	13,0	15,0	17,0	-	-	-	-
COP	W/W	3,88	4,11	4,10	4,11	-	-	-	-
Water flow rate system side	l/h	1486	1877	2061	2397	-	-	-	-
Useful head system side	kPa	58	65	58	79	-	-	-	-

(1) Data EN 14511:2022; System side water heat exchanger 23 °C / 18 °C; External air 35 °C

(2) Data EN 14511:2022; System side water heat exchanger 30 °C / 35 °C; External air 7 °C d.b. / 6 °C w.b.

ENERGY DATA

Energy index ANK - 400V

Size			020	030	040	045	050	085	100	150
Power supply: °										
SEER - 12/7 (EN14825: 2018) (1)										
Seasonal efficiency	°	%	119,80	124,10	129,80	129,80	135,00	135,00	149,40	142,30
	A,P	%	120,70	125,00	132,50	130,10	135,40	137,10	146,60	137,00
SEER	°	W/W	3,07	3,18	3,32	3,32	3,45	3,45	3,81	3,63
	A,P	W/W	3,09	3,20	3,59	3,33	3,46	3,50	3,74	3,50
UE 811/2013 performance in average ambient conditions (average) - 35 °C - Pdesignh ≤ 70 kW (2)										
Efficiency energy class	°		A+	A+	A+	A+	A+	A+	A++	A++
	A,P		A+	A+	A+	A+	A+	A+	A++	A+
Pdesignh	°	kW	7	9	11	13	14	16	26	32
	A,P	kW	7	9	11	13	14	15	25	30
ηsh	°	%	132,00	133,00	137,00	136,00	141,00	133,00	153,00	153,00
	A,P	%	135,00	137,00	140,00	138,00	143,00	135,00	150,00	145,00
SCOP	°	W/W	3,38	3,40	3,50	3,48	3,60	3,40	3,90	3,90
	A,P	W/W	3,45	3,50	3,58	3,53	3,65	3,45	3,83	3,70

(1) Calculation performed with FIXED water flow rate and VARIABLE outlet temperature.

(2) Efficiencies for low temperature applications (35 °C)

Energy index ANK - 230V

Size			020	030	040	045
Power supply: M						
SEER - 12/7 (EN14825: 2018) (1)						
Seasonal efficiency	°	%	119,60	124,10	127,80	139,00
	A,P	%	121,10	125,00	130,70	138,40
SEER	°	W/W	3,07	3,18	3,27	3,55
	A,P	W/W	3,10	3,20	3,34	3,54
UE 811/2013 performance in average ambient conditions (average) - 35 °C - Pdesignh ≤ 70 kW (2)						
Efficiency energy class	°		A+	A+	A+	A+
Pdesignh	°	kW	7	9	10	12
ηsh	°	%	130,00	133,00	134,00	139,00
	A,P	%	133,00	137,00	137,00	141,00
SCOP	°	W/W	3,33	3,40	3,43	3,55
	A,P	W/W	3,40	3,50	3,50	3,60

(1) Calculation performed with FIXED water flow rate and VARIABLE outlet temperature.

(2) Efficiencies for low temperature applications (35 °C)

ELECTRIC DATA

Size			020	030	040	045	050	085	100	150
Power supply: °										
Electric data										
Maximum current (FLA)	°	A	6,0	8,0	9,0	11,0	12,0	12,0	22,0	26,0
	A,P	A	6,8	8,4	9,8	11,9	13,1	13,6	23,6	28,9
Peak current (LRA)	°	A	40,0	40,0	54,0	61,0	71,0	91,0	73,0	105,0
	A,P	A	40,4	41,0	55,0	62,6	72,6	92,6	74,6	107,8
Peak current with Soft-start	°	A	-	-	-	-	-	-	-	-
Power supply: M										
Electric data										
Maximum current (FLA)	°	A	14,0	19,0	22,0	25,0	-	-	-	-
	A	A	14,6	20,1	22,9	26,3	-	-	-	-
	P	A	14,6	20,1	22,9	26,3	-	-	-	-
Peak current (LRA)	°	A	-	-	-	-	-	-	-	-
	A	A	-	-	-	-	-	-	-	-
Peak current with Soft-start	°	A	45,0	45,0	45,0	45,0	-	-	-	-
	A	A	45,7	45,7	45,7	46,3	-	-	-	-
	P	A	45,7	45,7	45,7	46,3	-	-	-	-


GENERAL TECHNICAL DATA

Size			020	030	040	045	050	085	100	150	
Compressor											
Type	°A,P	type								Scroll	
Compressor regulation	°A,P	Type								On-off	
Number	°A,P	no.	1	1	1	1	1	1	2	2	
Circuits	°A,P	no.	1	1	1	1	1	1	1	1	
Refrigerant	°A,P	type								R410A	
Refrigerant charge (1)	°A,P	kg	2,9	4,3	4,3	5,5	6,0	6,0	12,0	12,6	
System side heat exchanger											
Type	°A,P	type								Braze plate	
Number	°A,P	no.	1	1	1	1	1	1	1	1	
Hydraulic connections											
Connections (in/out)	°A,P	Type								Gas - F	
Size (in)	°A,P	Ø								1"¼	
Size (out)	°A,P	Ø								1"¼	
Fan											
Type	°A,P	type								Axial	
Fan motor	°A,P	type	Inverter	Inverter	Inverter	Inverter	Inverter	Inverter	Asynchronous	Asynchronous	
Number	°A,P	no.	1	1	2	2	2	2	2	2	
Air flow rate	°A,P	m³/h	3500	8000	8000	7500	7500	7500	14500	14500	
Sound data calculated in cooling mode (2)											
Sound power level	°A,P	dB(A)	68,0	70,5	70,5	70,5	70,5	70,5	77,0	78,0	
Sound pressure level (10 m)	°A,P	dB(A)	36,7	39,2	39,1	39,1	39,1	39,1	72,6	73,6	

(1) The load indicated in the table is an estimated and preliminary value. The final value of the refrigerant load is indicated on the unit's technical label. For further information contact the office.

(2) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification. Sound pressure (cold functioning) measured in free field, 10m away from the unit external surface (in compliance with UNI EN ISO 3744).

DIMENSIONS

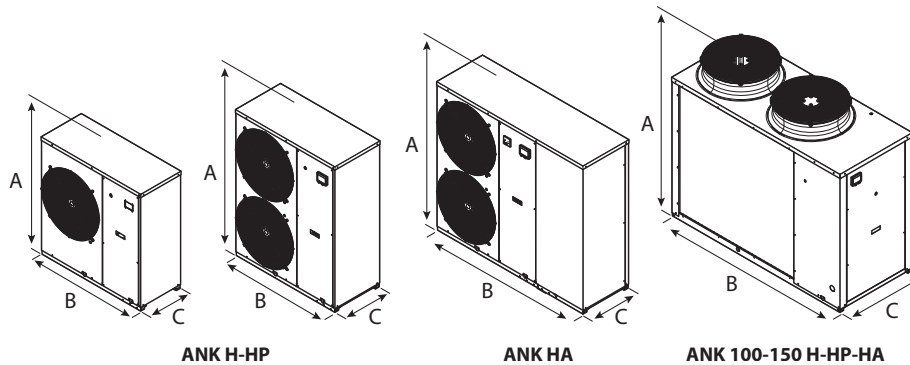

Size			020	030	040	045	050	085	100	150
Dimensions and weights										
A	°A,P	mm	1028	1281	1281	1281	1281	1281	1450	1450
	°P	mm	1000	1000	1000	1000	1000	1000	1750	1750
B	A	mm	1358	1450	1450	1450	1450	1450	1750	1750
	°A,P	mm	400	400	450	450	450	450	750	750
C	°	kg	118	149	152	165	172	174	296	341
	A	kg	160	211	214	232	238	241	364	412
Empty weight	P	kg	123	154	157	175	182	184	314	362

Aermec reserves the right to make any modifications deemed necessary. All data is subject to change without notice. Aermec does not assume responsibility or liability for errors or omissions.

Aermec S.p.A.

Via Roma, 996 - 37040 Bevilacqua (VR) - Italia
Tel. 0442633111 - Telefax 044293577
www.aermec.com