

# NSMI 1251-6102

Air-water chiller

Cooling capacity 285,6 ÷ 1342,6 kW

- Microchannel coil
- Night mode
- Operation up to 50 °C outdoor air
- Low electrical consumption



## DESCRIPTION

Air-cooled outdoor chiller designed to meet air conditioning needs in residential/commercial complexes or industrial applications.

Outdoor units with high-efficiency screw compressors axial fans, micro-channel external coils and plant side shell and tube heat exchanger.

In the unit with desuperheater, it is also possible to produce free-hot water. The base, the structure and the panels are made of galvanized steel treated with polyester paint RAL 9003.

## VERSIONS

**A** High efficiency  
**E** Silenced high efficiency

## FEATURES

### Operating field

Operation at full load up to 50 °C external air temperature depending on the size and version. For more information refer to the dedicated documents or the selection program Magellano.

### Unit with 1 / 2 cooling circuits

Unit with 1–2 refrigerant circuits.

The single circuit units have the inverter compressor, while the dual-circuit have an asynchronous compressor on/off switch and an inverter, the combination provides both high efficiency at part load and full load.

### Aluminum microchannel coils

The microchannel condensing aluminum coils ensure high levels of efficiency, reduced quantities of refrigerant and lower unit weight. The treatment "O" available as configurator it ensures high resistance to corrosion even in the most aggressive environments.

### Condensation control temperature

Fitted as standard with a device for electronic condensation control so that the unit can work even with low temperatures, adapting the air flow rate to the actual system request in order to reduce consumption.

### Electronic expansion valve

The possibility to use electronic expansion valve, offers significant benefits, especially when the chiller is working with partial loads, increasing the energy efficiency of the unit.

### Integrated hydronic kit

Integrated hydronic kit containing the main hydraulic components; available with various configurations with one or two pumps, high or low head, to obtain a solution that allows you to save money and to facilitate installation.

### Low noise version

Silenced versions "E" feature a special compressor jacket which ensures a further noise reduction of approximately 4dB.

### CONTROL PC<sup>5</sup>

Microprocessor adjustment, with 7", touch screen keyboard, which allows to navigate intuitively among the various screens, allowing to modify the operating parameters and graphically view the progress of some variables in real time and the ad adjustment includes complete management of the alarms and their log.

- Possibility to control two units in a Master-Slave configuration
- The presence of a programmable timer allows functioning time periods and a possible second set-point to be set.
- The temperature control takes place with the integral proportional logic, based on the water output temperature.
- **Night mode:** only in the **non-silenced** versions is it possible to set a silenced operating mode, which is useful for example at night for greater acoustic comfort but always guarantees performance even at peak load times.

## ACCESSORIES

**AER485P1:** RS-485 interface for supervision systems with MODBUS protocol.

**AER485P1 x n° 2:** RS-485 interface for supervision systems with MODBUS protocol.

**AERBACP:** Ethernet communication Interface for protocols Bacnet/IP, Modbus TCP/IP, SNMP

**AERNET:** The device allows the control, the management and the remote monitoring of a Chiller with a PC, smartphone or tablet using Cloud connection. AERNET works as Master while every unit connected is configured as Slave (max. 6 unit); also, with a simple click is possible to save a log file with all the connected unit data in the personal terminal for post analysis.

**MULTICHILLER\_EVO:** Control, switch-on and switch-off system of the single chillers where multiple units are installed in parallel, always ensuring constant flow rate to the evaporators.

**AVX:** Spring anti-vibration supports.

## ACCESSORIES COMPATIBILITY

### Accessories

Model	Ver	1251	1601	1801	2352	2652	2802	3202	3402	3802	4102	4402	4802	5202	5702	6102
AER485P1	A,E	.	.	.												
AER485P1 x n° 2 (1)	A,E				.	.	.	.	.	.	.	.	.	.	.	.
AERBACP	A,E	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
AERNET	A,E	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.
MULTICHILLER_EVO	A,E	.	.	.	.	.	.	.	.	.	.	.	.	.	.	.

(1) x Indicates the quantity of accessories to match.

### Antivibration

Ver	1251	1601	1801	2352	2652	2802	3202	3402	3802	4102	4402	4802	5202	5702	6102
A	AVX991	AVX992	AVX993	AVX996	AVX970	AVX995	AVX995	AVX995	AVX996	AVX988	AVX997	AVX998	AVX998	AVX998	AVX998
E	AVX991	AVX992	AVX994	AVX996	AVX970	AVX995	AVX995	AVX995	AVX996	AVX988	AVX997	AVX998	AVX998	AVX998	AVX998

### Heater exchangers

Ver	1251	1601	1801	2352	2652	2802	3202	3402	3802	4102	4402	4802	5202	5702	6102
A,E	KRS23	KRS24													

A grey background indicates the accessory must be assembled in the factory

### Anti-intrusion grid kit

Ver	1251	1601	1801	2352	2652	2802	3202	3402	3802	4102	4402	4802	5202	5702	6102
A,E	GP4V	GP4V	GPSV	GPSV	GP6V	GP7V	GP7V	GP7V	GP8V	GP9V	GP10V	GP11V	GP11V	GP11V	GP11V

A grey background indicates the accessory must be assembled in the factory

## CONFIGURATOR

Field	Description
1,2,3,4	NSMI
5,6,7,8	Size 1251, 1601, 1801, 2352, 2652, 2802, 3202, 3402, 3802, 4102, 4402, 4802, 5202, 5702, 6102
9	Model ◦ Cooling only
10	Heat recovery ◦ Without heat recovery D With desuperheater (1)
11	Version A High efficiency E Silenced high efficiency
12	Coils ◦ Aluminium microchannel I Copper-aluminium O Coated aluminium microchannel R Copper pipes-copper fins S Copper pipes-Tinned copper fins V Copper pieps-Coated aluminium fins
13	Fans ◦ Standard J Inverter
14	Power supply ◦ 400V~3 50Hz with fuses
15,16	Integrated hydronic kit Without hydronic kit 00 Without hydronic kit Kit with n° 1 pump PA Pump A

### FACTORY FITTED ACCESSORIES

**GP:** Anti-intrusion grid kit

**KRS:** Electric heater for the heat exchanger


Field	Description
PB	Pump B
PC	Pump C
PD	Pump D
PE	Pump E
PF	Pump F
PG	Pump G
PH	Pump H
PI	Pump I
PJ	Pump J (2)
<b>Pump n° 1 pump + stand-by pump</b>	
DA	Pump A + stand-by pump
DB	Pump B + stand-by pump
DC	Pump C + stand-by pump
DD	Pump D + stand-by pump
DE	Pump E + stand-by pump
DF	Pump F + stand-by pump
DG	Pump G + stand-by pump
DH	Pump H + stand-by pump
DI	Pump I + stand-by pump
DJ	Pump J + stand-by pump (2)
<b>Kit with 2 pumps</b>	
TF	Double pump F
TG	Double pump G
TH	Double pump H
TI	Double pump I
TJ	Double pump J (2)

(1) Minimum water temperature of 35 °C must always be ensured at heat exchanger inlet if working with low temperatures of water produced in the primary circuit.

(2) For all configurations including pump J please contact the factory.



## DIMENSIONS

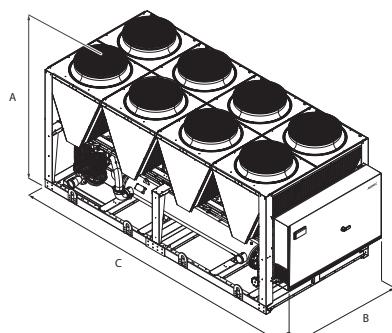

Size	1251	1601	1801	2352	2652	2802	3202	3402	3802	4102	4402	4802	5202	5702	6102
<b>Dimensions and weights</b>															
A	A,E	mm	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450
B	A,E	mm	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200
C	A,E	mm	4760	4760	5950	6400	7140	8330	8330	8330	9520	10710	11900	13090	13090
Size	1251	1601	1801	2352	2652	2802	3202	3402	3802	4102	4402	4802	5202	5702	6102
<b>Integrated hydronic kit: 00</b>															
<b>Dimensions and weights</b>															
Empty weight	A	kg	3752	4162	4578	6039	6447	6896	6987	7635	8103	8872	9324	10798	10888
	E	kg	4054	4464	4880	6642	7050	7499	7590	8239	8706	9475	9928	11637	11727
Weight functioning	A	kg	3832	4416	4832	6360	6768	7206	7275	8165	8632	9389	9841	11730	11819
	E	kg	4134	4718	5134	6964	7371	7809	7878	8768	9236	9993	10445	12568	12658

Aermec reserves the right to make any modifications deemed necessary.  
All data is subject to change without notice. Aermec does not assume responsibility or liability for errors or omissions.

**Aermec S.p.A.**  
Via Roma, 996 - 37040 Bevilacqua (VR) - Italia  
Tel. 0442633111 - Telefax 044293577  
[www.aermec.com](http://www.aermec.com)