

TRS

Heat recovery unit with enthalpy exchanger



- Compact dimensions
- Fans coupled to brushless Ec motors with low energy consumption
- Easy installation
- Horizontal installation



DESCRIPTION

The TRS heat recoveries, for horizontal inside installation allow the combination of maximum comfort with a safe energy saving.

It is more and more necessary in modern systems to create a forced ventilation, but also involves the expulsion of climate-controlled air, thus determining a higher energy consumption.

TRStends to solve these problems using a static heat recovery unit that saves most of the energy that would otherwise be lost.

The unit adopts high-efficiency heat recovery with countercurrent flows which consists of flat sheets of special paper that allow you to recover both sensible and latent heat (humidity). Therefore, no condensate drip tray or the relative drain pipe is required.

The high static pressures available allow ducts to be mounted, thereby allowing the extraction or input of air across multiple environments simultaneously.

They can be integrated in the direct expansion and hydronic systems both in heating and cooling mode.

FEATURES

- Very compact units that can only be installed horizontally, which require simple maintenance of the heat exchanger and filters both removable from the side.
- Free-cooling in mid-season thanks to the automatic by-pass function;

- Centrifugal fans with Brushless EC motor, with the possibility to adjust the speed on 10 different levels through the obligatory accessory TRSPTS1, touch screen control panel. In the absence of this accessory it will only be possible, by acting on the remote on-off contact, to operate the fans always at maximum speed;
- Built-in electrical panel with electronic board for the control of ventilation and free-cooling functions;
- Hexagonal-shaped enthalpy recovery unit to increase the exchange surface;
- Self-supporting panels in galvanized sheet with insulation, both internal and external. Access via the side door;
- ISO 16890 ePM_{2,5} 95% efficiency class filter with synthetic cleanable media and COARSE 50% pre-filter on fresh air, COARSE 50% filter on return air intake;
- Pressure switch with integrated dirty filter signal;
- Connections to funnels with plastic fittings;
- Silent operation;
- The installation does not require a condensate drain system.

ACCESSORIES

The following accessories are available for complete control of the TRS recovery units:

TRSPTS1: Control panel with Touch Screen. Mandatory accessory.

TRSQSW: Wall CO2 probe.

TRSUSW: Wall humidity probe.

ACCESSORIES COMPATIBILITY

| Accessory | TRS252 | TRS352 | TRS502 | TRS652 | TRS802 | TRS1002 | TRS1302 |
|-----------|--------|--------|--------|--------|--------|---------|---------|
| TRSPTS1 | • | • | • | • | • | • | • |
| TRSQSW | • | • | • | • | • | • | • |
| TRSUSW | • | • | • | • | • | • | • |

PERFORMANCE SPECIFICATIONS

| | | TRS252 | TRS352 | TRS502 | TRS652 | TRS802 | TRS1002 | TRS1302 |
|---------------------------------|-----------------------|------------------|--------|--------|--------|--------|---------|---------|
| Fans (1) | | | | | | | | |
| Nominal air flow rate | m ³ /h | 250 | 350 | 500 | 650 | 800 | 1000 | 1300 |
| Nominal useful head | Pa | 90 | 140 | 110 | 100 | 140 | 140 | 140 |
| Maximum input power | A | 0,5 | 0,6 | 0,6 | 1,2 | 1,4 | 2,1 | 2,7 |
| Type | type | | | | EC | | | |
| Speed number | no. | 10 | 10 | 10 | 10 | 10 | 10 | 10 |
| SFP int. | W/(m ³ /s) | 812,00 | 670,00 | 547,00 | 846,00 | 865,00 | 881,00 | 873,00 |
| Maximum input power | kW | 0,08 | 0,13 | 0,15 | 0,23 | 0,32 | 0,39 | 0,50 |
| Sound data (2) | | | | | | | | |
| Sound pressure level (1 m) | dB(A) | 34,0 | 37,0 | 39,0 | 40,0 | 42,0 | 43,0 | 44,0 |
| Heating performances (3) | | | | | | | | |
| Winter thermal efficiency | % | 73,0 | 74,0 | 76,0 | 74,0 | 76,0 | 76,0 | 74,2 |
| Enthalpy winter efficiency | % | 65,0 | 65,0 | 67,0 | 65,0 | 65,0 | 62,0 | 59,0 |
| Cooling performances (4) | | | | | | | | |
| Summer thermal efficiency | % | 73,0 | 74,0 | 76,0 | 74,0 | 76,0 | 76,0 | 74,0 |
| Summer enthalpy efficiency | % | 62,0 | 62,0 | 63,0 | 60,0 | 63,0 | 60,0 | 58,0 |
| Heat recovery unit | | | | | | | | |
| Dry heating efficiency (5) | % | 73,0 | 74,0 | 76,0 | 74,0 | 76,0 | 76,0 | 74,0 |
| Power supply | | 230V~50Hz - 60Hz | | | | | | |

(1) Performances referring to clean filters


(2) Sound pressure level assessed at 1m from suction / discharge ports and the inspection side at nominal conditions in free field.

(3) Recovery air 20 °C 50%; External air 5 °C 80%.

(4) Recovery air 26 °C 50%; External air 34 °C 50%.

(5) Relation between the inlet air heating gain and the expulsion air heating loss, both relating to the outside temperature, measured in dry reference conditions, with balanced mass flow and an internal/external air heating difference of 20K, excluding the heating gain generated by the fan motors and the internal leakage.

DIMENSIONS AND WEIGHTS

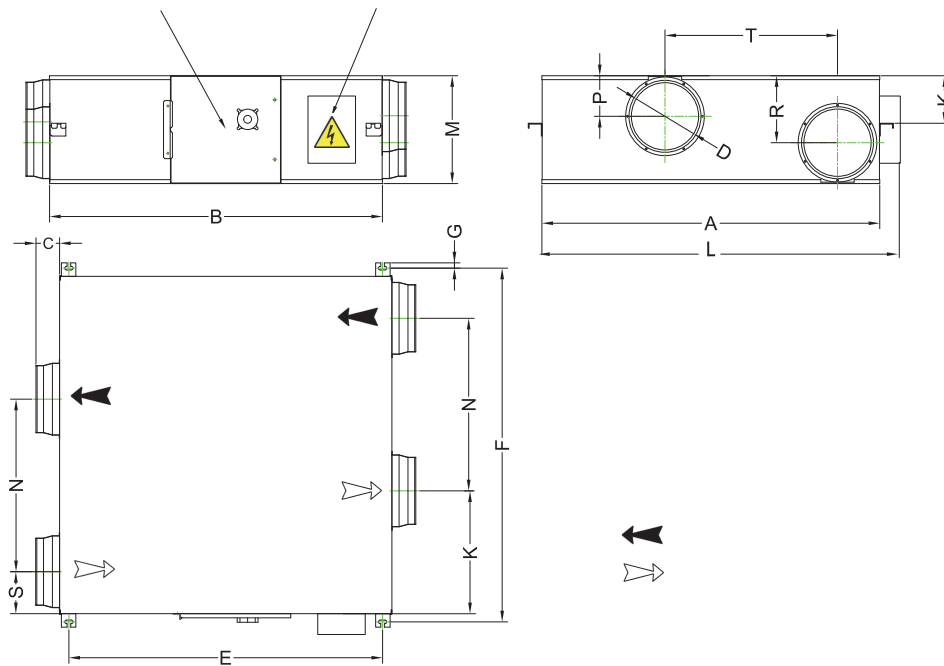

| Model | Dimension / [mm] | | | | | | | | | | | | | | | | Net weight / Gross weight [kg] |
|---------|------------------|------|-----|-----|------|------|----|------|-----|-----|-----|-----|-----|-----|-----|-----|--------------------------------------|
| | A | B | C | D | E | F | G | L | T | K | M | N | P | R | S | Y | |
| TRS252 | 599 | 814 | 100 | 150 | 675 | 657 | 19 | 650 | 315 | 111 | 270 | 315 | 111 | 111 | 142 | 142 | 30/33 |
| TRS352 | 804 | 814 | 100 | 150 | 675 | 862 | 19 | 855 | 480 | 111 | 270 | 480 | 111 | 111 | 162 | 162 | 37/41 |
| TRS502 | 904 | 894 | 107 | 200 | 754 | 960 | 19 | 955 | 500 | 135 | 270 | 500 | 135 | 135 | 202 | 202 | 43/47 |
| TRS652 | 884 | 1186 | 85 | 250 | 1115 | 940 | 19 | 945 | 428 | 170 | 388 | 428 | 170 | 170 | 228 | 228 | 65/70 |
| TRS802 | 1134 | 1186 | 85 | 250 | 1115 | 1190 | 19 | 1200 | 678 | 170 | 388 | 678 | 170 | 170 | 228 | 228 | 71/76 |
| TRS1002 | 1216 | 1199 | 85 | 250 | 1130 | 1273 | 19 | 1290 | 621 | 171 | 388 | 621 | 146 | 241 | 151 | 442 | 83/88 |
| TRS1302 | 1216 | 1199 | 85 | 250 | 1130 | 1273 | 19 | 1290 | 621 | 171 | 388 | 621 | 146 | 241 | 151 | 442 | 83/88 |

Aermec reserves the right to make any modifications deemed necessary.
All data is subject to change without notice. Aermec does not assume responsibility or liability for errors or omissions.

Aermec S.p.A.

Via Roma, 996 - 37040 Bevilacqua (VR) - Italia
Tel. 0442633111 - Telefax 044293577
www.aermec.com