

# WRL 026H - 161H

## Reversible water-cooled heat pump, gas side

Cooling capacity 6 ÷ 40 kW  
Heating capacity 8 ÷ 48 kW



- High efficiency
- Production of hot water up to 60 °C
- Production of domestic hot water priority
- Suitable for geothermal applications



### DESCRIPTION

Water-water offering chilled/hot water, designed to meet air conditioning needs in residential/commercial complexes or industrial applications. Indoor units with hermetic scroll compressors and plate heat exchangers.

In the configuration with desuperheater, it is also possible to produce free-hot water.

The technological choices made, always oriented to the highest quality, ensure very easy installation. In fact the electrical and hydraulic connections are all located in the upper part of the unit, facilitating the installation and maintenance operations and also reducing the technical gaps and their position in as little space as possible.

### VERSIONS

- ° Without storage tank
- A With storage tank

### FEATURES

#### Operating field

Operation at full power with domestic hot water for the system up to 60 °C.

(for more information, refer to the technical documentation).

#### Plug and play

All the units are equipped with scroll compressors and plate heat exchangers; the base and panelling are made of steel treated with RAL 9003 polyester paints.

The electric and hydraulic connections are all located on the upper part of the unit facilitating installation and maintenance. This allows reduced plant room space and installation in the smallest space possible. The heat pump can be supplied with all the components required for its installation in new systems and to replace other heat generators. It can be combined with low temperature emission systems such as floor heating or fan coils, but also with conventional radiators.

### Version with Integrated hydronic kit

The standard unit is supplied with a water filter, differential pressure switch and safety valve already installed on the service and source side (and also on the recovery side, if present).

To obtain a solution that offers economic savings and facilitates installation, these units can be configured with an integrated hydronic kit on both hydraulic sides (service and source).

Low-head and high-head pumps are available, along with a modulating 2-way valve that can only be applied on the source side to reduce consumption in applications with groundwater.

### CONTROL MPC

Microprocessor adjustment, with keyboard and LCD display, for easy access on the unit is a menu available in several languages.

- Possibility to control two units in a Master-Slave configuration
- The presence of a programmable timer allows functioning time periods and a possible second set-point to be set.
- The temperature control takes place with the integral proportional logic, based on the water output temperature.

### ACCESSORIES

**AER485P1:** RS-485 interface for supervision systems with MODBUS protocol.

**AERBACP:** Ethernet communication Interface for protocols Bacnet/IP, Modbus TCP/IP, SNMP

**KSAE:** External air sensor.

**PGD1:** Allows you to control the unit at a distance.

**SGD:** Electronic expansion that enables connecting to the photovoltaic system and heat pumps to accumulate heat in the DHW tank or in the heating system during the photovoltaic production phase and release it at times when heating demand is highest.

**SSM:** Probe to be used with the mixer valve in applications with radiant panels. The probe requires the VMF-CRP area accessory as well.

**TAH:** Ambient terminal with temperature and humidity probe - 230V AC flush-mounting model that can command an On-Off valve or a zone pump and dehumidifier consent.

**TAT:** Ambient terminal with temperature probe - 230V AC flush-mounting model that can command an On-Off valve or a zone pump.  
**VT:** Anti-vibration supports.

**VPHL:** Pressure switch valve with bypass solenoid valve, during cooling mode operation the bypass valve is closed so the water flows exclusively through the circuit with the pressure switch. During heating mode operation the water flows through both branches of the circuit.

## ACCESSORIES COMPATIBILITY

Model	026	031	041	051	071	081	101	141	161
AER48SP1	.	.	.	.	.	.	.	.	.
AERBACP	.	.	.	.	.	.	.	.	.
KSAE	.	.	.	.	.	.	.	.	.
PGD1	.	.	.	.	.	.	.	.	.
SGD	.	.	.	.	.	.	.	.	.
SSM	.	.	.	.	.	.	.	.	.
TAH	.	.	.	.	.	.	.	.	.
TAT	.	.	.	.	.	.	.	.	.

## Antivibration

Version	Integrated hydronic kit, source side	System side - pumps	026	031	041	051	071
°	°B,I,U,V	°N,P	VT9	VT9	VT9	VT9	VT9
A	°B,I,U,V	°N,P	VT15	VT15	VT15	VT15	VT15

Version	Integrated hydronic kit, source side	System side - pumps	081	101	141	161
°	°B,I,U,V	°N,P	VT9	VT15	VT15	VT15
A	°B,I,U,V	°N,P	VT15	VT15A	VT15A	VT15A

## Pressure switch valve

Ver	026	031	041	051	071	081	101	141	161
°A	VPHL1	VPHL1	VPHL2	VPHL2	VPHL3	VPHL3	VPHL4	VPHL4	VPHL4

## CONFIGURATOR

Field	Description
<b>1,2,3</b>	<b>WRL</b>
<b>4,5,6</b>	<b>Size</b> 026, 031, 041, 051, 071, 081, 101, 141, 161
<b>7</b>	<b>Operating field</b>
X	Electronic thermostatic expansion valve
<b>8</b>	<b>Model</b>
H	Reversible heat pump, gas side
<b>9</b>	<b>Version</b>
°	Without storage tank
A	With storage tank
<b>10</b>	<b>Heat recovery</b>
°	Without heat recovery
<b>11</b>	<b>Integrated hydronic kit, source side</b>
°	Without hydronic kit
B	On-off pump (1)
I	Inverter pump (2)
U	Pump high head (3)
V	Applications with bore hole water
<b>12</b>	<b>System side - pumps</b>
°	Without hydronic kit
N	Pump high head (3)
P	Pump (4)
<b>13</b>	<b>Recovery side - pumps</b>
°	Without hydronic kit
<b>14</b>	<b>Soft-start</b>
°	Without soft-start
S	With soft-start
<b>15</b>	<b>Power supply</b>
°	400V~3N 50Hz
4	230V~3 50Hz (5)
M	230V~ 50Hz (6)

(1) For size WRL 051 ÷ 081. The speed of the inverter pump must be set upon commissioning, according to the useful static pressure required; once it has been set, the pump will work at a constant flow rate.

(2) Only for WRL 026 ÷ 081

(3) Only for WRL 101 ÷ 161

(4) In sizes WRL 026 ÷ 081, it's an inverter circulator; for other sizes, it's an on-off pump.

(5) Only for WRL 051 ÷ 141

(6) Only for WRL 026 ÷ 041

## PERFORMANCE SPECIFICATIONS 12 °C / 7 °C - 40 °C / 45 °C

### WRL - (H°) - (400V 3N ~ 50Hz)

Size		026	031	041	051	071	081	101	141	161
<b>Power supply: °</b>										
<b>Cooling performance 12 °C / 7 °C (1)</b>										
Cooling capacity	kW	6,3	8,1	10,4	13,7	17,8	20,3	27,6	35,4	40,4
Input power	kW	1,6	2,3	2,3	3,0	4,2	5,0	6,1	8,5	10,1
Cooling total input current	A	4,0	4,0	6,0	7,0	9,0	10,0	13,0	17,0	19,0
EER	W/W	3,98	3,47	4,52	4,51	4,18	4,08	4,49	4,15	4,01
Water flow rate source side	l/h	1346	1782	2178	2870	3759	4312	5763	7501	8611
Pressure drop source side	kPa	13	16	19	20	24	27	28	37	44
Water flow rate system side	l/h	1085	1396	1798	2367	3058	3492	4748	6098	6964
Pressure drop system side	kPa	9	11	13	14	16	18	20	24	29
<b>Heating performance 40 °C / 45 °C (2)</b>										
Heating capacity	kW	7,9	9,5	12,4	16,4	20,9	24,0	32,7	41,7	47,6
Input power	kW	2,1	2,4	3,0	4,0	5,2	6,1	8,1	10,5	12,3
Heating total input current	A	4,8	4,8	6,6	8,3	10,0	12,0	16,0	20,0	23,0
COP	W/W	3,84	3,96	4,08	4,07	4,01	3,94	4,05	3,97	3,87
Water flow rate source side	l/h	1714	2086	2759	3635	4611	5291	7248	9196	10445
Pressure drop source side	kPa	34	34	46	43	50	59	52	62	73
Water flow rate system side	l/h	1364	1644	2151	2842	3616	4165	5669	7217	8246
Pressure drop system side	kPa	20	18	28	28	32	38	35	43	51

(1) Date 14511:2022; Water user side 12 °C / 7 °C; Water source side 30 °C / 35 °C  
 (2) Date 14511:2022; Water user side 40 °C / 45 °C; Water source side 10 °C / 7 °C

### Technical data WRL (H°) - (230V ~ 50Hz)

Size		026	031	041	051	071	081	101	141	161
<b>Power supply: M</b>										
<b>Cooling performance 12 °C / 7 °C (1)</b>										
Cooling capacity	kW	6,3	7,9	10,3	-	-	-	-	-	-
Input power	kW	1,7	1,9	2,4	-	-	-	-	-	-
Cooling total input current	A	9,0	11,0	14,0	-	-	-	-	-	-
EER	W/W	3,74	4,13	4,28	-	-	-	-	-	-
Water flow rate source side	l/h	1363	1678	2179	-	-	-	-	-	-
Pressure drop source side	kPa	14	16	19	-	-	-	-	-	-
Water flow rate system side	l/h	1085	1362	1781	-	-	-	-	-	-
Pressure drop system side	kPa	9	10	13	-	-	-	-	-	-
<b>Heating performance 40 °C / 45 °C (2)</b>										
Heating capacity	kW	7,9	9,9	12,6	-	-	-	-	-	-
Input power	kW	2,1	2,6	3,3	-	-	-	-	-	-
Heating total input current	A	10,0	13,0	17,0	-	-	-	-	-	-
COP	W/W	3,85	3,89	3,82	-	-	-	-	-	-
Water flow rate source side	l/h	1717	2173	2745	-	-	-	-	-	-
Pressure drop source side	kPa	34	36	46	-	-	-	-	-	-
Water flow rate system side	l/h	1366	1723	2186	-	-	-	-	-	-
Pressure drop system side	kPa	20	22	29	-	-	-	-	-	-

(1) Date 14511:2022; Water user side 12 °C / 7 °C; Water source side 30 °C / 35 °C  
 (2) Date 14511:2022; Water user side 40 °C / 45 °C; Water source side 10 °C / 7 °C

## PERFORMANCE SPECIFICATIONS 23 °C / 18 °C - 30 °C / 35 °C

### WRL - (H°) - (400V 3N ~ 50Hz)

Size		026	031	041	051	071	081	101	141	161
<b>Power supply: °</b>										
<b>Cooling performance 23 °C / 18 °C (1)</b>										
Cooling capacity	kW	8,3	10,0	13,5	17,5	23,9	27,4	34,9	47,8	54,5
Input power	kW	1,6	1,9	2,4	3,3	4,4	5,2	6,6	9,0	10,7
Cooling total input current	A	4,1	3,0	6,0	7,6	9,2	10,0	14,0	17,0	19,0
EER	W/W	5,22	5,34	5,54	5,35	5,39	5,25	5,31	5,32	5,11
Water flow rate source side	l/h	1681	2039	2719	3547	4844	5557	7089	9679	11092
Pressure drop source side	kPa	20	21	30	31	40	45	42	62	73
Water flow rate system side	l/h	1428	1737	2330	3022	4136	4730	6040	8270	9438
Pressure drop system side	kPa	16	17	22	23	29	33	32	44	53
<b>Heating performance 30 °C / 35 °C (2)</b>										
Heating capacity	kW	8,1	10,1	13,0	17,0	22,6	25,8	34,1	45,0	50,8
Input power	kW	1,6	1,9	2,5	3,2	4,3	5,1	6,4	8,7	10,3
Heating total input current	A	3,7	3,7	5,2	6,4	8,4	9,7	12,0	16,0	19,0
COP	W/W	5,03	5,38	5,29	5,33	5,24	5,06	5,31	5,18	4,91
Water flow rate source side	l/h	1397	1751	2246	2934	3893	4456	5888	7770	8761
Pressure drop source side	kPa	21	20	30	30	37	43	38	50	58
Water flow rate system side	l/h	1901	2418	3098	4045	5363	6102	8125	10710	11951
Pressure drop system side	kPa	42	46	58	53	68	78	65	84	95

(1) Date 14511:2022; Water user side 23 °C / 18 °C; Water source side 30 °C / 35 °C

(2) Date 14511:2022; Water user side 30 °C / 35 °C; Water source side 10 °C / 5 °C

### WRL (H°) - (230V ~ 50Hz)

Size		026	031	041	051	071	081	101	141	161
<b>Power supply: M</b>										
<b>Cooling performance 23 °C / 18 °C (1)</b>										
Cooling capacity	kW	8,3	10,1	13,3	-	-	-	-	-	-
Input power	kW	1,6	2,0	2,5	-	-	-	-	-	-
Cooling total input current	A	8,1	11,0	14,0	-	-	-	-	-	-
EER	W/W	5,05	5,18	5,27	-	-	-	-	-	-
Water flow rate source side	l/h	1690	2070	2699	-	-	-	-	-	-
Pressure drop source side	kPa	22	24	29	-	-	-	-	-	-
Water flow rate system side	l/h	1428	1755	2295	-	-	-	-	-	-
Pressure drop system side	kPa	16	17	22	-	-	-	-	-	-
<b>Heating performance 30 °C / 35 °C (2)</b>										
Heating capacity	kW	8,2	10,2	13,1	-	-	-	-	-	-
Input power	kW	1,6	1,9	2,6	-	-	-	-	-	-
Heating total input current	A	8,1	9,7	13,0	-	-	-	-	-	-
COP	W/W	5,05	5,27	5,01	-	-	-	-	-	-
Water flow rate source side	l/h	1409	1767	2263	-	-	-	-	-	-
Pressure drop source side	kPa	21	23	31	-	-	-	-	-	-
Water flow rate system side	l/h	1919	2430	3082	-	-	-	-	-	-
Pressure drop system side	kPa	42	45	58	-	-	-	-	-	-

(1) Date 14511:2022; Water user side 23 °C / 18 °C; Water source side 30 °C / 35 °C

(2) Date 14511:2022; Water user side 30 °C / 35 °C; Water source side 10 °C / 5 °C

## ENERGY INDICES (REG. 2016/2281 EU)

### WRL - (H°) - (400V 3N ~ 50Hz)

Size		026	031	041	051	071	081	101	141	161
<b>Power supply: °</b>										
<b>SEER - 12/7 (EN14825: 2018) (1)</b>										
SEER	W/W	3,64	3,39	4,31	4,53	4,20	4,13	4,81	4,49	4,36
Seasonal efficiency	%	142,7%	132,4%	169,4%	178,1%	165,1%	162,3%	189,4%	176,5%	171,4%
<b>UE 811/2013 performance in average ambient conditions (average) - 55 °C - Pdesignh ≤ 70 kW (2)</b>										
Pdesignh	kW	10	12	16	21	26	31	42	53	61
ηsh	%	141.0%	145.0%	151.0%	152.0%	151.0%	150.0%	175.0%	173.0%	167.0%
SCOP	W/W	3,73	3,83	3,98	4,00	3,98	3,95	4,58	4,53	4,38
Efficiency energy class		A++	A++	A+++	A+++	A+++	A+++	A+++	A+++	A+++
<b>UE 811/2013 performance in average ambient conditions (average) - 35 °C - Pdesignh ≤ 70 kW (3)</b>										
Pdesignh	kW	11	14	17	23	30	35	45	60	68
ηsh	%	195.0%	210.0%	207.0%	212.0%	211.0%	205.0%	233.0%	226.0%	212.0%
SCOP	W/W	5,08	5,45	5,38	5,50	5,48	5,33	6,03	5,85	5,50
Efficiency energy class		A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++

(1) Calculation performed with FIXED water flow rate and VARIABLE outlet temperature.

(2) Efficiencies for average temperature applications (55 °C)

(3) Efficiencies for low temperature applications (35 °C)

### WRL - (H°) - (230V ~ 50Hz)

Size		026	031	041	051	071	081	101	141	161
<b>Power supply: M</b>										
<b>SEER - 12/7 (EN14825: 2018) (1)</b>										
SEER	W/W	3,48	3,80	4,15	-	-	-	-	-	-
Seasonal efficiency	%	136,2%	148,8%	163,1%	-	-	-	-	-	-
<b>UE 811/2013 performance in average ambient conditions (average) - 55 °C - Pdesignh ≤ 70 kW (2)</b>										
Pdesignh	kW	10	13	16	-	-	-	-	-	-
ηsh	%	142.0%	145.0%	142.0%	-	-	-	-	-	-
SCOP	W/W	3,75	3,83	3,75	-	-	-	-	-	-
Efficiency energy class		A++	A++	A++	-	-	-	-	-	-
<b>UE 811/2013 performance in average ambient conditions (average) - 35 °C - Pdesignh ≤ 70 kW (3)</b>										
Pdesignh	kW	11	14	17	-	-	-	-	-	-
ηsh	%	198.0%	212.0%	199.0%	-	-	-	-	-	-
SCOP	W/W	5,15	5,50	5,18	-	-	-	-	-	-
Efficiency energy class		A+++	A+++	A+++	-	-	-	-	-	-

(1) Calculation performed with FIXED water flow rate and VARIABLE outlet temperature.

(2) Efficiencies for average temperature applications (55 °C)

(3) Efficiencies for low temperature applications (35 °C)

### WRL - (H ABP) - (400V 3N ~ 50Hz)

Size		026	031	041	051	071	081	101	141	161
<b>Power supply: °</b>										
<b>SEER - 12/7 (EN14825: 2018) (1)</b>										
SEER	W/W	4,47	4,07	5,37	5,40	4,96	4,85	5,17	4,75	4,67
Seasonal efficiency	%	175,9%	159,7%	211,8%	213,1%	195,3%	190,9%	203,7%	186,8%	183,9%
<b>UE 811/2013 performance in average ambient conditions (average) - 55 °C - Pdesignh ≤ 70 kW (2)</b>										
Pdesignh	kW	10	12	16	21	26	30	41	52	60
ηsh	%	151.0%	155.0%	161.0%	161.0%	157.0%	155.0%	173.0%	170.0%	166.0%
SCOP	W/W	3,98	4,08	4,23	4,23	4,13	4,08	4,53	4,45	4,35
Efficiency energy class		A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++
<b>UE 811/2013 performance in average ambient conditions (average) - 35 °C - Pdesignh ≤ 70 kW (3)</b>										
Pdesignh	kW	10	13	17	22	30	34	44	59	66
ηsh	%	223.0%	238.0%	222.0%	237.0%	222.0%	210.0%	232.0%	230.0%	216.0%
SCOP	W/W	5,78	6,15	5,75	6,13	5,75	5,45	6,00	5,95	5,60
Efficiency energy class		A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++	A+++

(1) Calculation performed with FIXED water flow rate and VARIABLE outlet temperature.

(2) Efficiencies for average temperature applications (55 °C)

(3) Efficiencies for low temperature applications (35 °C)

**WRL - (H ABP) - (230V ~ 50Hz)**

Size		026	031	041	051	071	081	101	141	161
<b>Power supply: M</b>										
<b>SEER - 12/7 (EN14825: 2018) (1)</b>										
SEER	W/W	4,21	4,63	5,14	-	-	-	-	-	-
Seasonal efficiency	%	165,5%	182,3%	202,7%	-	-	-	-	-	-
<b>UE 811/2013 performance in average ambient conditions (average) - 55 °C - Pdesignh ≤ 70 kW (2)</b>										
Pdesignh	kW	10	13	16	-	-	-	-	-	-
ηsh	%	152,0%	156,0%	152,0%	-	-	-	-	-	-
SCOP	W/W	4,00	4,10	4,00	-	-	-	-	-	-
Efficiency energy class		A+++	A+++	A+++	-	-	-	-	-	-
<b>UE 811/2013 performance in average ambient conditions (average) - 35 °C - Pdesignh ≤ 70 kW (3)</b>										
Pdesignh	kW	11	13	17	-	-	-	-	-	-
ηsh	%	228,0%	243,0%	214,0%	-	-	-	-	-	-
SCOP	W/W	5,90	6,28	5,55	-	-	-	-	-	-
Efficiency energy class		A+++	A+++	A+++	-	-	-	-	-	-

(1) Calculation performed with FIXED water flow rate and VARIABLE outlet temperature.

(2) Efficiencies for average temperature applications (55 °C)

(3) Efficiencies for low temperature applications (35 °C)

**ELECTRIC DATA**


Size		026	031	041	051	071	081	101	141	161
<b>Power supply: °</b>										
<b>Electric data</b>										
Maximum current (FLA)	A	8,5	9,0	11,0	13,0	20,0	23,0	23,0	37,0	43,0
Peak current (LRA)	A	34,0	37,0	50,0	66,0	75,0	75,0	88,0	91,0	94,0
<b>Power supply: M</b>										
<b>Electric data</b>										
Maximum current (FLA)	A	19,0	22,0	26,0	-	-	-	-	-	-
Peak current (LRA)	A	63,0	84,0	99,0	-	-	-	-	-	-

**GENERAL TECHNICAL DATA**

Size		026	031	041	051	071	081	101	141	161
<b>Compressor</b>										
Type	°A type					Scroll				
Number	°A no.	1	1	1	1	1	1	2	2	2
Circuits	°A no.	1	1	1	1	1	1	1	1	1
Refrigerant	°A type					R410A				
<b>Source side heat exchanger</b>										
Type	°A type					Brazed plate				
Number	°A no.	1	1	1	1	1	1	1	1	1
<b>System side heat exchanger</b>										
Type	°A type					Brazed plate				
Number	°A no.	1	1	1	1	1	1	1	1	1
<b>Source side hydraulic connections</b>										
Connections (in/out)	°A Type					Gas - F				
Sizes (in/out)	°A Ø					1"1/4				
<b>System side hydraulic connections</b>										
Connections (in/out)	°A Type					Gas - F				
Sizes (in/out)	°A Ø					1"1/4				
<b>Sound data calculated in cooling mode (1)</b>										
Sound power level	°A dB(A)	55,5	57,0	57,5	59,0	60,0	60,5	62,0	63,0	63,5
Sound pressure level (10 m)	° dB(A)	24,3	25,8	26,3	27,7	28,7	29,2	30,6	31,6	32,1
	A dB(A)	24,1	25,6	26,1	27,6	28,6	29,1	30,5	31,5	32,0

(1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification. Sound pressure (cold functioning) measured in free field, 10m away from the unit external surface (in compliance with UNI EN ISO 3744).

## DIMENSIONS

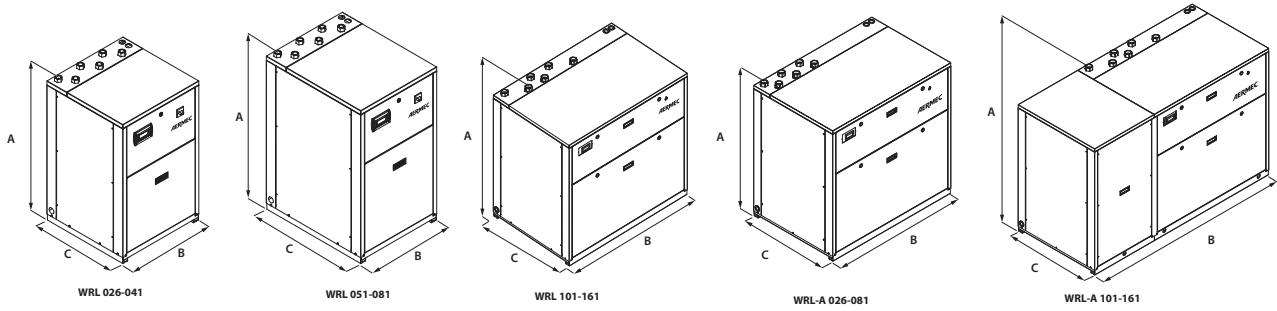

Size		026	031	041	051	071	081	101	141	161
<b>Dimensions and weights</b>										
A	°	mm	976	976	976	1126	1126	1126	1126	1126
	A	mm	1126	1126	1126	1126	1126	1126	1126	1126
B	°	mm	605	605	605	605	605	605	1155	1155
	A	mm	1155	1155	1155	1155	1155	1155	1755	1755
C	°	mm	603	603	603	773	773	773	773	773
	A	mm	773	773	773	773	773	773	773	773
Empty weight	°	kg	120	125	130	150	170	180	260	270
	A	kg	190 (1)	200 (1)	210 (1)	230 (1)	250 (1)	260 (1)	340 (1)	350 (1)

(1) Units with two heat exchangers and storage tank, without pumps

Aermec reserves the right to make any modifications deemed necessary.  
All data is subject to change without notice. Aermec does not assume  
responsibility or liability for errors or omissions.

**Aermec S.p.A.**  
Via Roma, 996 - 37040 Bevilacqua (VR) - Italia  
Tel. 0442633111 - Telefax 044293577  
www.aermec.com