

# NRB 0800-2406 B

## Air-cooled chiller with free cooling (glycol-free)

Cooling capacity 211 ÷ 680 kW



- Microchannel coil
- Night mode
- Operation up to 50 °C outdoor air
- High efficiency also at partial loads



### DESCRIPTION

Air-cooled outdoor chiller designed to meet air conditioning needs in residential/commercial complexes or industrial applications.

Outdoor units with scroll compressors, axial flow fans, micro-channel coil (source side), plate heat exchanger and thermostatic expansion valve (mechanical or electronic, depending on the model).

The base, the structure and the panels are made of galvanized steel treated with polyester paint RAL 9003.

### VERSIONS

- A** High efficiency
- E** Silenced high efficiency
- N** Silenced very high efficiency
- U** Very high efficiency

### FEATURES

#### Operating field

Operation at full load up to 50 °C external air temperature depending on the size and version. For more information refer to the dedicated documentations or the selection program Magellano.

#### Dual-circuit unit

Unit with 2 refrigerant circuits designed to provide maximum efficiency at full load, ensuring high efficiency at partial loads also and ensuring continuity in case one of the circuits stops.

#### Condensation control temperature

Fitted as standard with a device for electronic condensation control so that the unit can work even with low temperatures, adapting the air flow rate to the actual system request in order to reduce consumption.

#### Aluminium microchannel coils

The whole range uses microchannel condenser coils allowing reduction of refrigerant charge but keeping the same high efficiency.

#### Free-cooling water coils

These units also have a water coil dedicated to free-cooling mode. Free-cooling offers significant energy saving in applications that require cooling all year round.

As soon as the outside air temperature allows, a valve makes the water flow towards the free-cooling battery which is cooled directly by the air. The

compressors are completely shut down, if possible, leading to considerable electrical savings.

■ *If a higher output is needed in free cooling, there is also the "G" free cooling plus model with boosted water coil.*

#### Free cooling with glycol water

Intermediate plate heat exchanger that creates two circuits:

1. Glycol hydraulic circuit (glycol is added to protect the coil from freezing).
2. Primary hydraulic circuit for glycol-free systems.

#### Electronic expansion valve

**The units from size 1805 to 2406 have an electronic expansion valve as standard.**

The possibility to use electronic expansion valve, offers significant benefits, especially when the chiller is working with partial loads, increasing the energy efficiency of the unit.

#### Integrated hydronic kit

To obtain a solution that allows you to save money and to facilitate installation. These units can be configured with an integrated hydronic system.

The kit contains the main hydraulic components, and is available in various configurations with a single pump or a standby pump too, so the customer can choose the right useful head.

#### CONTROL

Microprocessor adjustment, with 7", touch screen keyboard, which allows to navigate intuitively among the various screens, allowing to modify the operating parameters and graphically view the progress of some variables in real time and the adjustment includes complete management of the alarms and their log.

- The presence of a programmable timer allows functioning time periods and a possible second set-point to be set.
- The temperature control takes place with the integral proportional logic, based on the water output temperature.
- **Night mode:** only in the **non-silenced** versions is it possible to set a silenced operating mode, which is useful for example at night for greater acoustic comfort but always guarantees performance even at peak load times.

## ACCESSORIES

**AER485P1:** RS-485 interface for supervision systems with MODBUS protocol.

**AERBACP:** Ethernet communication Interface for protocols Bacnet/IP, Modbus TCP/IP, SNMP

**AERLINK:** Wifi Gateway with an RS485 serial port that can be installed on all machines or on all controllers having an RS485 serial port themselves. The module is capable of simultaneously activating the AP WIFI (Access point) and WIFI Station functions, the latter making it possible to connect to the home or business LAN both with VMF-E5 and E6. To facilitate certain management and control operations of the unit, the AERAPP application is available both for Android and iOS systems.

**AERNET:** The device allows the control, the management and the remote monitoring of a Chiller with a PC, smartphone or tablet using Cloud connection. AERNET works as Master while every unit connected is configured as Slave (max. 6 unit); also, with a simple click is possible to save a log file with all the connected unit datas in the personal terminal for post analysis.

**FB1:** Air filter to protect the micro-channel coils. Formed of a frame and a composite baffle in micro-expanded aluminium mesh, with particularly low pressure drops.

**FL:** Flow switch.

**MULTICHILLER\_EVO:** Control, switch-on and switch-off system of the single chillers where multiple units are installed in parallel, always ensuring constant flow rate to the evaporators.

**PGD1:** Allows you to control the unit at a distance.

**AVX:** Spring anti-vibration supports.

## FACTORY FITTED ACCESSORIES

**DRE:** Electronic device for peak current reduction.

**RIF:** Power factor correction. Connected in parallel to the motor allowing about 10% reduction of input current.

**GP\_:** Anti-intrusion grid kit

**T6:** Double safety valve with exchange cock, both on the high and low pressure branches.

## ACCESSORIES COMPATIBILITY

Model	Ver	0800	0900	1000	1100	1200	1400	1600	1805	2006	2206	2406
AER485P1	A,E	.	.	.	.	.	.	.	.	.	.	.
	N,U	.	.	.	.	.	.	.	.	.	.	.
AERBACP	A,E	.	.	.	.	.	.	.	.	.	.	.
	N,U	.	.	.	.	.	.	.	.	.	.	.
AERLINK	A,E	.	.	.	.	.	.	.	.	.	.	.
	N,U	.	.	.	.	.	.	.	.	.	.	.
AERNET	A,E	.	.	.	.	.	.	.	.	.	.	.
	N,U	.	.	.	.	.	.	.	.	.	.	.
FB1	A,E	.	.	.	.	.	.	.	.	.	.	.
	N,U	.	.	.	.	.	.	.	.	.	.	.
FL	A,E	.	.	.	.	.	.	.	.	.	.	.
	N,U	.	.	.	.	.	.	.	.	.	.	.
MULTICHILLER_EVO	A,E	.	.	.	.	.	.	.	.	.	.	.
	N,U	.	.	.	.	.	.	.	.	.	.	.
PGD1	A,E	.	.	.	.	.	.	.	.	.	.	.
	N,U	.	.	.	.	.	.	.	.	.	.	.

## Antivibration

Ver	0800	0900	1000	1100	1200	1400	1600	1805	2006	2206	2406
<b>Integrated hydronic kit: 00, DA, DB, DC, DE, DF, DG, DH, DI, DJ, PA, PB, PC, PD, PE, PF, PG, PH, PI, PJ</b>											
A,E	AVX. (1)	AVX. (1)	AVX. (1)	AVX. (1)	AVX. (1)	AVX. (1)	-	-	-	-	-
N,U	AVX. (1)	AVX. (1)	AVX. (1)	AVX. (1)	AVX. (1)	AVX. (1)	AVX. (1)	AVX. (1)	AVX. (1)	AVX. (1)	AVX. (1)

(1) Contact us.

## Device for peak current reduction

Ver	0800	0900	1000	1100	1200	1400
A,E,N,U	DRENRB0800 (1)	DRENRB0900 (1)	DRENRB1000 (1)	DRENRB1100 (1)	DRENRB1200 (1)	DRENRB1400 (1)

(1) Only for supplies of 400V 3N ~ 50Hz and 400V 3 ~ 50Hz. x 2 or x 3 (if present) indicates the quantity to be ordered.

A grey background indicates the accessory must be assembled in the factory

Ver	1600	1805	2006	2206	2406
N,U	DRENRB1600 (1)	DRENRB1805 (1)	DRENRB2006 (1)	DRENRB2206 (1)	DRENRB2406 (1)

(1) Only for supplies of 400V 3N ~ 50Hz and 400V 3 ~ 50Hz. x 2 or x 3 (if present) indicates the quantity to be ordered.

A grey background indicates the accessory must be assembled in the factory

## Power factor correction

Ver	0800	0900	1000	1100	1200	1400
A	RIFNRB0800	RIFNRB0900	RIFNRB1000	RIFNRB1100	RIFNRB1200	RIFNRB1400
E,U	RIFNRB0800	RIFNRB0900	RIFNRB1000	RIFNRB1101	RIFNRB1201	RIFNRB1401
N	RIFNRB0801	RIFNRB0901	RIFNRB1001	RIFNRB1101	RIFNRB1201	RIFNRB1401

A grey background indicates the accessory must be assembled in the factory

Ver	1600	1805	2006	2206	2406
N,U	RIFNRB1601	RIFNRB1815	RIFNRB2016	RIFNRB2216	RIFNRB2416

A grey background indicates the accessory must be assembled in the factory

## Anti-intrusion grid

Ver	0800	0900	1000	1100	1200	1400	1600	1805	2006	2206	2406
A	GP2VN	GP2VN	GP3VNF	GP3VNF	GP3VNF	GP3VNF	-	-	-	-	-
E	GP3VNF	GP3VNF	GP3VNF	GP4VN	GP4VN	GP4VN	-	-	-	-	-
N	GP4VN	GP4VN	GP4VN	GP5VN	GP5VN	GP5VN	GP6V	GP7V	GP7V	GP8V	GP8V
U	GP3VNF	GP3VNF	GP3VNF	GP4VN	GP4VN	GP4VN	GP5VN	GP6V	GP6V	GP7V	GP7V

A grey background indicates the accessory must be assembled in the factory

## CONFIGURATOR

Field	Description
<b>1,2,3</b>	<b>NRB</b>
<b>4,5,6,7</b>	<b>Size</b> 0800, 0900, 1000, 1100, 1200, 1400, 1600, 1805, 2006, 2206, 2406
<b>8</b>	<b>Operating field</b>
°	Standard mechanic thermostatic valve
X	Electronic thermostatic expansion valve
Y	Low temperature mechanic thermostatic valve
Z	Low temperature electronic thermostatic valve
<b>9</b>	<b>Model</b>
B	Free-cooling glycol free
G	Free-cooling glycol free plus (1)
<b>10</b>	<b>Heat recovery</b>
°	Without heat recovery
D	With desuperheater (2)
<b>11</b>	<b>Version</b>
A	High efficiency
E	Silenced high efficiency
N	Silenced very high efficiency
U	Very high efficiency
<b>12</b>	<b>Coils / free-cooling coils</b>
°	Alluminium microchannel / Copper - aluminium
I	Copper-aluminium / Copper-aluminium
O	Painted alluminium microchannel / Copper painted aluminium
R	Copper-copper/Copper-copper
S	Copper-Tinned copper / Copper -Tinned copper
V	Copper-painted aluminium / Copper-painted aluminium
<b>13</b>	<b>Fans</b>
°	Standard
J	Inverter
<b>14</b>	<b>Power supply</b>
°	400V~3 50Hz with magnet circuit breakers
<b>15,16</b>	<b>Integrated hydronic kit</b>
00	Without hydronic kit
PA	Pump A
PB	Pump B
PC	Pump C
PD	Pump D
PE	Pump E
PF	Pump F
PG	Pump G
PH	Pump H
PI	Pump I
PJ	Pump J (3)
DA	Pump A + stand-by pump
DB	Pump B + stand-by pump
DC	Pump C + stand-by pump
DE	Pump E + stand-by pump
DF	Pump F + stand-by pump
DG	Pump G + stand-by pump
DH	Pump H + stand-by pump
DI	Pump I + stand-by pump
DJ	Pump J + stand-by pump (3)

(1) The Free cooling Plus "G" models are only compatible with "100" and "0" coils.

(2) The temperature of the water in the heat exchanger inlet must never drop below 35°C.

(3) For all configurations including pump J please contact the factory.

## PERFORMANCE SPECIFICATIONS

### NRB - A

Size		0800	0900	1000	1100	1200	1400	1600	1805	2006	2206	2406
<b>Model: B</b>												
<b>Cooling performance chiller operation (1)</b>												
Cooling capacity	kW	211,8	234,3	273,4	307,1	335,9	373,3	-	-	-	-	-
Input power	kW	76,0	88,0	93,9	108,9	124,8	145,6	-	-	-	-	-
Cooling total input current	A	134,0	152,0	165,0	189,0	215,0	248,0	-	-	-	-	-
EER	W/W	2,79	2,66	2,91	2,82	2,69	2,56	-	-	-	-	-
Water flow rate system side	l/h	36397	40249	46968	52762	57713	64138	-	-	-	-	-
Pressure drop system side	kPa	53	58	66	74	88	100	-	-	-	-	-
<b>Cooling performances with free-cooling glycol-free (2)</b>												
Cooling capacity	kW	119,9	121,9	165,6	172,5	176,2	181,3	-	-	-	-	-
Input power	kW	9,8	9,8	14,3	14,3	14,4	14,4	-	-	-	-	-
Free cooling total input current	A	17,0	17,0	25,0	25,0	25,0	25,0	-	-	-	-	-
EER	W/W	12,21	12,41	11,56	12,02	12,26	12,60	-	-	-	-	-

(1) System side water heat exchanger 12 °C/7 °C; External air 35 °C; Chiller operation 100%; Free-cooling 0%

(2) Acqua scambiatore lato utenza 12 °C / 8,7 °C ; Aria esterna 2 °C; circuito idraulico glicolato al 30%; circuito idraulico primario glicole 0%.

Size		0800	0900	1000	1100	1200	1400	1600	1805	2006	2206	2406
<b>Model: G</b>												
<b>Cooling performance chiller operation (1)</b>												
Cooling capacity	kW	210,3	232,4	271,9	305,1	333,3	369,6	-	-	-	-	-
Input power	kW	76,8	89,2	94,8	110,0	126,2	147,6	-	-	-	-	-
Cooling total input current	A	135,0	154,0	167,0	191,0	217,0	251,0	-	-	-	-	-
EER	W/W	2,74	2,61	2,87	2,77	2,64	2,50	-	-	-	-	-
Water flow rate system side	l/h	36136	39921	46723	52411	57266	63506	-	-	-	-	-
Pressure drop system side	kPa	53	57	65	73	87	98	-	-	-	-	-
<b>Cooling performances with free-cooling glycol-free (2)</b>												
Cooling capacity	kW	125,4	127,6	172,1	179,6	183,6	189,2	-	-	-	-	-
Input power	kW	9,9	9,9	14,5	14,5	14,6	14,6	-	-	-	-	-
Free cooling total input current	A	17,0	17,0	25,0	25,0	25,0	25,0	-	-	-	-	-
EER	W/W	12,62	12,83	11,86	12,36	12,62	12,99	-	-	-	-	-

(1) System side water heat exchanger 12 °C/7 °C; External air 35 °C; Chiller operation 100%; Free-cooling 0%

(2) Acqua scambiatore lato utenza 12 °C / 8,7 °C ; Aria esterna 2 °C; circuito idraulico glicolato al 30%; circuito idraulico primario glicole 0%.

### NRB - E

Size		0800	0900	1000	1100	1200	1400	1600	1805	2006	2206	2406
<b>Model: B</b>												
<b>Cooling performance chiller operation (1)</b>												
Cooling capacity	kW	220,6	242,6	265,3	310,3	344,7	379,2	-	-	-	-	-
Input power	kW	73,4	84,2	95,7	106,6	122,4	142,0	-	-	-	-	-
Cooling total input current	A	126,0	142,0	160,0	179,0	205,0	236,0	-	-	-	-	-
EER	W/W	3,00	2,88	2,77	2,91	2,82	2,67	-	-	-	-	-
Water flow rate system side	l/h	37902	41688	45573	53310	59226	65155	-	-	-	-	-
Pressure drop system side	kPa	48	53	61	68	84	102	-	-	-	-	-
<b>Cooling performances with free-cooling glycol-free (2)</b>												
Cooling capacity	kW	139,1	141,5	143,7	187,8	192,4	195,3	-	-	-	-	-
Input power	kW	11,0	11,0	11,0	14,6	14,6	14,6	-	-	-	-	-
Free cooling total input current	A	19,0	19,0	18,0	24,0	24,0	24,0	-	-	-	-	-
EER	W/W	12,69	12,92	13,11	12,89	13,17	13,37	-	-	-	-	-

(1) System side water heat exchanger 12 °C/7 °C; External air 35 °C; Chiller operation 100%; Free-cooling 0%

(2) Acqua scambiatore lato utenza 12 °C / 8,7 °C ; Aria esterna 2 °C; circuito idraulico glicolato al 30%; circuito idraulico primario glicole 0%.

Size		0800	0900	1000	1100	1200	1400	1600	1805	2006	2206	2406
<b>Model: G</b>												
<b>Cooling performance chiller operation (1)</b>												
Cooling capacity	kW	219,4	241,1	263,2	308,4	342,1	375,8	-	-	-	-	-
Input power	kW	74,1	85,1	96,8	107,7	123,7	143,8	-	-	-	-	-
Cooling total input current	A	126,0	144,0	162,0	181,0	206,0	238,0	-	-	-	-	-
EER	W/W	2,96	2,83	2,72	2,86	2,76	2,61	-	-	-	-	-
Water flow rate system side	l/h	37695	41419	45215	52979	58785	64562	-	-	-	-	-
Pressure drop system side	kPa	47	52	61	67	83	100	-	-	-	-	-
<b>Cooling performances with free-cooling glycol-free (2)</b>												
Cooling capacity	kW	144,3	147,0	149,3	195,0	200,0	203,0	-	-	-	-	-
Input power	kW	11,1	11,1	11,1	14,7	14,8	14,8	-	-	-	-	-
Free cooling total input current	A	19,0	19,0	18,0	25,0	25,0	24,0	-	-	-	-	-
EER	W/W	13,03	13,28	13,48	13,24	13,55	13,75	-	-	-	-	-

(1) System side water heat exchanger 12 °C/7 °C; External air 35 °C; Chiller operation 100%; Free-cooling 0%

(2) Acqua scambiatore lato utenza 12 °C / 8,7 °C ; Aria esterna 2 °C; circuito idraulico glicolato al 30%; circuito idraulico primario glicole 0%.

**NRB - U**

Size		0800	0900	1000	1100	1200	1400	1600	1805	2006	2206	2406
<b>Model: B</b>												
<b>Cooling performance chiller operation (1)</b>												
Cooling capacity	kW	227,3	250,9	275,8	320,4	357,9	396,3	455,4	515,9	569,2	633,7	680,9
Input power	kW	73,7	83,6	94,1	106,4	120,6	138,5	153,5	173,2	195,2	215,9	238,4
Cooling total input current	A	133,0	149,0	166,0	189,0	212,0	240,0	267,0	304,0	341,0	379,0	418,0
EER	W/W	3,08	3,00	2,93	3,01	2,97	2,86	2,97	2,98	2,92	2,94	2,86
Water flow rate system side	l/h	39046	43104	47382	55045	61497	68087	78245	88642	97793	108881	116982
Pressure drop system side	kPa	51	56	66	72	90	111	75	92	112	133	126
<b>Cooling performances with free-cooling glycol-free (2)</b>												
Cooling capacity	kW	159,6	162,9	165,8	215,5	222,0	225,8	284,2	346,2	361,7	409,5	413,7
Input power	kW	14,3	24,3	14,3	19,1	19,1	19,1	24,1	31,6	32,0	36,8	36,8
Free cooling total input current	A	26,0	26,0	25,0	34,0	33,0	33,0	42,0	55,0	56,0	65,0	64,0
EER	W/W	11,14	11,37	11,57	11,31	11,62	11,82	11,80	10,97	11,29	11,14	11,26

(1) System side water heat exchanger 12 °C/7 °C; External air 35 °C; Chiller operation 100%; Free-cooling 0%

(2) Acqua scambiatore lato utenza 12 °C / 8,7 °C ; Aria esterna 2 °C; circuito idraulico glicolato al 30%; circuito idraulico primario glicole 0%.

Size		0800	0900	1000	1100	1200	1400	1600	1805	2006	2206	2406
<b>Model: G</b>												
<b>Cooling performance chiller operation (1)</b>												
Cooling capacity	kW	226,2	249,6	274,2	318,8	356,0	393,8	452,9	513,3	565,9	630,2	676,8
Input power	kW	74,4	84,4	95,0	107,4	121,8	139,9	154,8	174,8	197,2	218,0	240,9
Cooling total input current	A	134,0	150,0	167,0	190,0	213,0	242,0	269,0	306,0	344,0	382,0	421,0
EER	W/W	3,04	2,96	2,89	2,97	2,92	2,82	2,93	2,94	2,87	2,89	2,81
Water flow rate system side	l/h	38871	42893	47115	54781	61158	67658	77819	88186	97229	108280	116278
Pressure drop system side	kPa	50	56	-	72	89	109	74	91	111	132	125
<b>Cooling performances with free-cooling glycol-free (2)</b>												
Cooling capacity	kW	165,6	169,1	172,3	223,6	230,7	234,8	295,8	360,9	278,5	427,4	432,0
Input power	kW	14,5	14,5	14,5	19,3	19,3	19,3	24,4	31,9	32,4	37,2	37,2
Free cooling total input current	A	26,0	26,0	25,0	34,0	34,0	33,0	42,0	56,0	57,0	65,0	65,0
EER	W/W	11,42	11,66	11,88	11,59	11,93	12,14	12,13	11,31	11,68	11,50	11,62

(1) System side water heat exchanger 12 °C/7 °C; External air 35 °C; Chiller operation 100%; Free-cooling 0%

(2) Acqua scambiatore lato utenza 12 °C / 8,7 °C ; Aria esterna 2 °C; circuito idraulico glicolato al 30%; circuito idraulico primario glicole 0%.

**NRB - N**

Size		0800	0900	1000	1100	1200	1400	1600	1805	2006	2206	2406
<b>Model: B</b>												
<b>Cooling performance chiller operation (1)</b>												
Cooling capacity	kW	228,3	252,4	278,0	320,3	358,3	397,2	454,4	510,9	563,3	628,5	675,3
Input power	kW	72,5	82,2	92,3	104,6	118,7	136,3	151,0	171,5	194,0	213,5	236,4
Cooling total input current	A	124,0	140,0	156,0	177,0	199,0	227,0	251,0	287,0	325,0	360,0	399,0
EER	W/W	3,15	3,07	3,01	3,06	3,02	2,91	3,01	2,98	2,90	2,94	2,86
Water flow rate system side	l/h	39222	43370	47761	55033	61559	68239	78074	87785	96785	107983	116017
Pressure drop system side	kPa	46	50	60	72	91	103	71	90	110	131	124
<b>Cooling performances with free-cooling glycol-free (2)</b>												
Cooling capacity	kW	173,9	177,9	181,5	218,5	225,6	235,0	293,7	331,4	347,7	386,9	390,8
Input power	kW	14,5	14,5	14,5	18,1	18,2	18,2	24,8	28,3	28,9	31,6	31,6
Free cooling total input current	A	25,0	25,0	25,0	31,0	31,0	30,0	41,0	47,0	48,0	53,0	53,0
EER	W/W	11,95	12,23	12,48	12,07	12,41	12,90	11,84	11,73	12,04	12,24	12,37

(1) System side water heat exchanger 12 °C/7 °C; External air 35 °C; Chiller operation 100%; Free-cooling 0%

(2) Acqua scambiatore lato utenza 12 °C / 8,7 °C ; Aria esterna 2 °C; circuito idraulico glicolato al 30%; circuito idraulico primario glicole 0%.

Size		0800	0900	1000	1100	1200	1400	1600	1805	2006	2206	2406
<b>Model: G</b>												
<b>Cooling performance chiller operation (1)</b>												
Cooling capacity	kW	227,4	251,4	276,7	318,8	356,3	394,6	451,9	508,1	559,8	624,6	670,7
Input power	kW	73,1	82,8	93,1	105,5	119,8	137,7	152,4	173,0	195,9	215,7	239,0
Cooling total input current	A	125,0	141,0	157,0	178,0	201,0	229,0	253,0	289,0	328,0	362,0	402,0
EER	W/W	3,11	3,03	2,97	3,02	2,98	2,87	2,97	2,94	2,86	2,90	2,81
Water flow rate system side	l/h	39073	43187	47536	54768	61222	67801	77644	87290	96173	107317	115226
Pressure drop system side	kPa	46	50	59	72	90	101	71	89	108	130	123
<b>Cooling performances with free-cooling glycol-free (2)</b>												
Cooling capacity	kW	180,0	184,4	188,2	226,3	233,9	244,1	305,6	344,3	362,0	402,3	406,6
Input power	kW	14,7	14,6	14,7	18,3	18,4	18,4	25,0	28,5	29,2	31,9	31,9
Free cooling total input current	A	25,0	25,0	25,0	31,0	31,0	31,0	42,0	48,0	49,0	54,0	54,0
EER	W/W	12,25	12,55	12,81	12,37	12,73	13,26	12,20	12,07	12,42	12,61	12,74

(1) System side water heat exchanger 12 °C/7 °C; External air 35 °C; Chiller operation 100%; Free-cooling 0%

(2) Acqua scambiatore lato utenza 12 °C / 8,7 °C ; Aria esterna 2 °C; circuito idraulico glicolato al 30%; circuito idraulico primario glicole 0%.

## ENERGY DATA

Size			0800	0900	1000	1100	1200	1400	1600	1805	2006	2206	2406
<b>Model: B</b>													
<b>SEPR - (EN14825: 2018) High temperature with standard fans (1)</b>													
SEPR	A	W/W	5,61	5,25	5,27	5,43	5,25	5,05	-	-	-	-	-
	E	W/W	6,07	5,58	5,44	5,59	5,50	5,13	-	-	-	-	-
	N	W/W	6,38	6,09	5,91	5,92	5,78	5,41	5,67	5,51	5,56	5,58	5,53
	U	W/W	6,22	5,87	5,69	5,84	5,71	5,56	5,73	5,52	5,60	5,58	5,53

(1) Calculation performed with FIXED water flow rate.

Size			0800	0900	1000	1100	1200	1400	1600	1805	2006	2206	2406
<b>Model: G</b>													
<b>SEPR - (EN14825: 2018) High temperature with standard fans (1)</b>													
SEPR	A	W/W	5,82	5,37	5,48	5,60	5,37	4,87	-	-	-	-	-
	E	W/W	6,42	5,83	5,62	5,85	5,69	5,10	-	-	-	-	-
	N,U	W/W	6,96	6,54	6,28	6,28	6,08	5,63	6,13	5,90	5,77	5,73	5,58

(1) Calculation performed with FIXED water flow rate.

## ELECTRIC DATA

Size			0800	0900	1000	1100	1200	1400	1600	1805	2006	2206	2406
<b>Electric data</b>													
Maximum current (FLA)	A	A	190,4	206,8	242,5	271,9	301,2	330,2	-	-	-	-	-
	E	A	209,8	226,2	242,5	291,3	320,6	349,6	-	-	-	-	-
	N	A	229,2	245,6	261,9	310,7	340,0	369,0	423,3	487,5	532,3	580,7	609,7
	U	A	209,8	226,2	242,5	291,3	320,6	349,6	398,0	468,1	512,9	561,3	590,3
Peak current (LRA)	A	A	379,0	434,2	469,9	522,6	551,9	664,4	-	-	-	-	-
	E	A	398,4	453,6	469,9	542,0	571,3	683,8	-	-	-	-	-
	N	A	417,8	473,0	489,3	561,4	590,7	703,2	757,5	821,7	866,5	914,9	943,9
	U	A	398,4	453,6	469,9	542,0	571,3	683,8	732,2	802,3	847,1	895,5	924,5

## GENERAL TECHNICAL DATA

Size			0800	0900	1000	1100	1200	1400	1600	1805	2006	2206	2406
<b>Compressor</b>													
Type	A,E,N,U	type	Scroll										
Compressor regulation	A,E,N,U	Type	On-Off										
Number	A,E,N,U	no.	4	4	4	4	4	4	4	5	6	6	6
Circuits	A,E,N,U	no.	2	2	2	2	2	2	2	2	2	2	2
Refrigerant	A,E,N,U	type	R410A										
Refrigerant charge (1)	A	kg	32,0	32,0	48,0	48,0	48,0	48,0	64,0	64,0	80,0	80,0	96,0
	E,U	kg	48,0	48,0	48,0	64,0	64,0	64,0	80,0	96,0	96,0	112,0	112,0
	N	kg	64,0	64,0	64,0	80,0	80,0	80,0	96,0	112,0	112,0	128,0	128,0
<b>Hydraulic connections</b>													
Connections (in/out)	A,E,N,U	Type	Grooved joints										
<b>Hydraulic connections without hydronic kit</b>													
Sizes (in/out)	A,E,N,U	Ø	3"	3"	3"	3"	3"	3"	4"	4"	4"	4"	4"
<b>Hydraulic connections with hydronic kit</b>													
Sizes (in/out)	A,E,N,U	Ø	3"	3"	3"	3"	3"	3"	4"	4"	4"	4"	4"

(1) The load indicated in the table is an estimated and preliminary value. The final value of the refrigerant load is indicated on the unit's technical label. For further information contact the office.

**In the versions without a hydronic kit, the water filter is supplied with a connection point for making the connection. In the versions with a hydronic kit, it is supplied ready-mounted.**

## SOUND DATA


Size			0800	0900	1000	1100	1200	1400	1600	1805	2006	2206	2406
<b>Sound data calculated in cooling mode (1)</b>													
Sound power level	A	dB(A)	88,0	88,1	90,3	90,2	90,2	90,2	-	-	-	-	-
	E	dB(A)	85,0	85,1	85,1	86,5	86,5	86,5	-	-	-	-	-
	N	dB(A)	86,5	86,6	86,6	87,7	87,7	87,7	88,7	90,0	90,5	91,7	92,2
	U	dB(A)	90,2	90,3	90,3	91,7	91,7	91,7	92,9	94,4	94,9	96,2	96,7
Sound pressure level (10 m)	A	dB(A)	55,9	56,0	58,0	57,9	57,9	57,9	-	-	-	-	-
	E	dB(A)	52,9	53,0	52,8	54,3	54,3	54,3	-	-	-	-	-
	N	dB(A)	54,4	54,5	54,4	55,4	55,4	55,4	56,3	57,6	58,0	59,2	59,6
	U	dB(A)	58,0	58,1	58,0	59,4	59,4	59,4	60,5	62,0	62,4	63,7	64,0

(1) Sound power calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification. Sound pressure (cold functioning) measured in free field, 10m away from the unit external surface (in compliance with UNI EN ISO 3744).

## FANS DATA

Size			0800	0900	1000	1100	1200	1400	1600	1805	2006	2206	2406
<b>Model: B</b>													
<b>Fan</b>													
Type	A,E	type	axials	axials	axials	axials	axials	axials	-	-	-	-	-
	N,U	type	axials										
Number	A	no.	4	4	6	6	6	6	-	-	-	-	-
	E	no.	6	6	6	8	8	8	-	-	-	-	-
	N	no.	8	8	8	10	10	10	12	14	14	16	16
	U	no.	6	6	6	8	8	8	10	12	12	14	14
Air flow rate	A	m <sup>3</sup> /h	57600	57600	86400	86400	86400	86400	-	-	-	-	-
	E	m <sup>3</sup> /h	64800	64800	64800	86400	86400	86400	-	-	-	-	-
	N	m <sup>3</sup> /h	86400	86400	86400	108000	108000	108000	129600	151200	151200	172800	172800
	U	m <sup>3</sup> /h	86400	86400	86400	115200	115200	115200	144000	172800	172800	201600	201600
<b>Model: G</b>													
<b>Fan</b>													
Type	A,E	type	axials	axials	axials	axials	axials	axials	-	-	-	-	-
	N,U	type	axials										
Number	A	no.	4	4	6	6	6	6	-	-	-	-	-
	E	no.	6	6	6	8	8	8	-	-	-	-	-
	N	no.	8	8	8	10	10	10	12	14	14	16	16
	U	no.	6	6	6	8	8	8	10	12	12	14	14
Air flow rate	A	m <sup>3</sup> /h	57600	57600	86400	86400	86400	86400	-	-	-	-	-
	E	m <sup>3</sup> /h	64800	64800	64800	86400	86400	86400	-	-	-	-	-
	N	m <sup>3</sup> /h	86400	86400	86400	108000	108000	108000	129600	151200	151200	172800	172800
	U	m <sup>3</sup> /h	86400	86400	86400	115200	115200	115200	144000	172800	172800	201600	201600

## DIMENSIONS

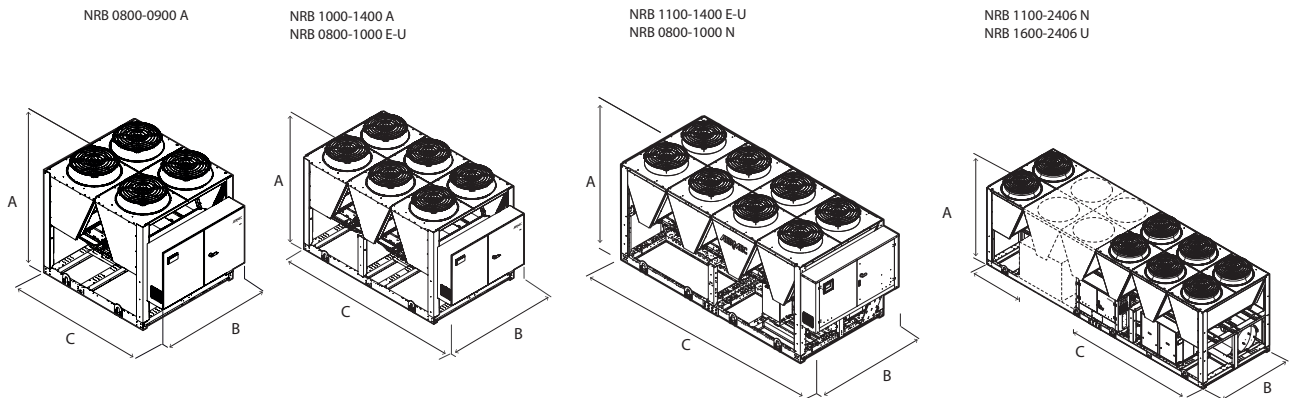

Size			0800	0900	1000	1100	1200	1400	1600	1805	2006	2206	2406
<b>Dimensions and weights</b>													
A	A,E	mm	2450	2450	2450	2450	2450	2450	-	-	-	-	-
	N,U	mm	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450	2450
B	A,E	mm	2200	2200	2200	2200	2200	2200	-	-	-	-	-
	N,U	mm	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200
C	A	mm	2780	2780	3970	3970	3970	3970	-	-	-	-	-
	E	mm	3970	3970	3970	4760	4760	4760	-	-	-	-	-
	N	mm	4760	4760	4760	5950	5950	5950	7140	8330	8330	9520	9520
	U	mm	3970	3970	3970	4760	4760	4760	5950	7140	7140	8330	8330

■ For the weights please contact the factory.

Aermec reserves the right to make any modifications deemed necessary. All data is subject to change without notice. Aermec does not assume responsibility or liability for errors or omissions.

**Aermec S.p.A.**  
Via Roma, 996 - 37040 Bevilacqua (VR) - Italia  
Tel. 0442633111 - Telefax 044293577  
www.aermec.com