

# NRG 0282-0804

## Air-water chiller

Cooling capacity 55,8 ÷ 224,6 kW



- High efficiency also at partial loads
- Low refrigerant charge
- Compact dimensions



### DESCRIPTION

Air-cooled outdoor chiller designed to meet air conditioning needs in residential/commercial complexes or industrial applications.

**These are outdoor units with streamlined scroll compressors used with R32 gas (A2L).**

Condensing coil with copper pipes and aluminium louvers, plate heat exchanger.

The base, the structure and the panels are made of galvanized steel treated with polyester paint RAL 9003.

### VERSIONS

- ° Standard
- A High efficiency
- E Silenced high efficiency
- L Standard silenced
- N Silenced very high efficiency
- U Very high efficiency

### FEATURES

#### Operating field

Operation at full load up to 50°C external air temperature. Unit can produce chilled water up to -10 °C.

For more information refer to the selection program and to the dedicated documentation.

#### Units mono or dual-circuit

The units are mono or dual-circuit, to ensure maximum efficiency both at full load and at partial load.

#### Refrigerant HFC R32

The environmental impact of the units is reduced considerably owing to the last generation R32 refrigerant.

Combining a reduced refrigerant load with a low global warming potential (GWP), these units boast low equivalent CO<sub>2</sub> values.

- *The leak detector is supplied as per standard.*

### New condensing Coils

**The whole range uses copper - aluminium condensation coils with reduced diameter rows**, allowing a lower quantity of gas to be used compared to traditional coils.

### Electronic expansion valve

The possibility to use electronic expansion valve, offers significant benefits, especially when the chiller is working with partial loads, increasing the energy seasonal efficiency of the unit.

### Option integrated hydronic kit

An optional, integrated hydronic kit containing the main hydraulic components, to obtain a solution that allows you to save money and to facilitate installation.

**It is available in different configurations with storage tank or with fixed or variable pumps also inverter.**

- **VARIABLE FLOW RATE:** *Correctly adjust the speed of the inverter-controlled pumps according to the load demand of the system, in order to reduce power consumption and to guarantee operation of the unit even in critical conditions.*

### CONTROL

Microprocessor adjustment, with keyboard and LCD display, for easy access on the unit is a menu available in several languages.

- The presence of a programmable timer allows functioning time periods and a possible second set-point to be set.
- The temperature control takes place with the integral proportional logic, based on the water output temperature.
- **Floating HP control:** the function can be activated with inverter fans or with DCPX which allows unit operation to be optimised at any operating point through continuous modulation of the fan speed. In addition, the use of inverter fans ensures an increase in energy efficiency at partial loads.
- **Night mode:** only in the **non-silenced versions with the fan to be, inverter or phase-cut or with the DCPX accessory**, a silenced operation profile can be set, which is useful, for example, at night for greater acoustic comfort, but always ensures performance even at peak load hours.

## ACCESSORIES

**AER485P1:** RS-485 interface for supervision systems with MODBUS protocol.

**AERBACP:** Ethernet communication Interface for protocols Bacnet/IP, Modbus TCP/IP, SNMP

**AERNET:** The device allows the control, the management and the remote monitoring of a Chiller with a PC, smartphone or tablet using Cloud connection. AERNET works as Master while every unit connected is configured as Slave (max. 6 unit); also, with a simple click is possible to save a log file with all the connected unit datas in the personal terminal for post analysis.

**MULTICHILLER\_EVO:** Control, switch-on and switch-off system of the single chillers where multiple units are installed in parallel, always ensuring constant flow rate to the evaporators.

**PGD1:** Allows you to control the unit at a distance.

**SGD:** Electronic expansion that enables connecting to the photovoltaic system and heat pumps to accumulate heat in the DHW tank or in the heating system during the photovoltaic production phase and release it at times when heating demand is highest.

**VT:** Anti-vibration supports.

**DCPX:** Device for condensation temperature control, with continuous speed modulation of fans by using a pressure transducer.

**GP:** Anti-intrusion grid.

## FACTORY FITTED ACCESSORIES

**T6:** Double safety valve with exchange cock, both on the high and low pressure branches.

**DRE:** Electronic device for peak current reduction.

**RIF:** Power factor correction. Connected in parallel to the motor allowing about 10% reduction of input current.

## ACCESSORIES COMPATIBILITY

### Accessories

Model	Ver	0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804
AER485P1	°A					*	*	*	*	*	*	*	*	*	*	*	*	*	*
	E,N	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	L	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	U	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
AERBACP	°A					*	*	*	*	*	*	*	*	*	*	*	*	*	*
	E,N	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	L	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	U	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
AERNET	°A					*	*	*	*	*	*	*	*	*	*	*	*	*	*
	E,N	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	L	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	U	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
MULTICHILLER_EVO	°A					*	*	*	*	*	*	*	*	*	*	*	*	*	*
	E,N	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	L	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	U	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
PGD1	°A					*	*	*	*	*	*	*	*	*	*	*	*	*	*
	E,N	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	L	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	U	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
SGD	E,L,N	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
	U				*														

### Condensation control temperature

Ver	0282	0302	0332	0352	0502	0552	0554	0602	0604
<b>Fans: °</b>									
E,L	DCPX145	DCPX145	DCPX145	DCPX145	-	-	-	-	-
N	DCPX145	DCPX145	DCPX145	-	-	-	-	-	-
<b>Fans: M</b>									
°A	-	-	-	-	DCPX146	DCPX146	DCPX147	DCPX146	DCPX147
E,L	-	-	-	-	As standard	As standard	As standard	As standard	As standard
N	-	-	-	As standard	As standard	As standard	As standard	As standard	As standard
U	-	-	-	DCPX146	DCPX146	DCPX146	DCPX147	DCPX147	DCPX147
Ver	0652	0654	0682	0702	0704	0752	0754	0802	0804
<b>Fans: M</b>									
°A	DCPX146	DCPX147	DCPX147	DCPX147	DCPX147	DCPX147	DCPX147	DCPX147	DCPX147
E	As standard	As standard	As standard	As standard	As standard	As standard	As standard	As standard	As standard
L	As standard	As standard	As standard	As standard	As standard	As standard	As standard	-	-
N	As standard	As standard	As standard	-	-	-	-	-	-
U	DCPX147	DCPX147	DCPX147	-	-	-	-	-	-

### Antivibration

Ver	0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804
<b>Integrated hydronic kit: 00, I1, I2, I3, I4, P1, P2, P3, P4</b>																		
°	-	-	-	-	VT11	VT11	VT11	VT11	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT22	VT22
A	-	-	-	-	VT11	VT11	VT11	VT11	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT22	VT22
E	VT17	VT13	VT13	VT13	VT11	VT11	VT11	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22
L	VT17	VT17	VT13	VT13	VT11	VT11	VT11	VT11	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	-	-
N	VT13	VT13	VT13	VT13	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22
U	-	-	-	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22
<b>Integrated hydronic kit: 01, 02, 03, 04, 05, 06, 07, 08, K1, K2, K3, K4, W1, W2, W3, W4</b>																		
°	-	-	-	-	VT11	VT11	VT11	VT11	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT22	VT22
A	-	-	-	-	VT11	VT11	VT11	VT11	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT22	VT22

Ver	0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804
E	VT13	VT13	VT13	VT13	VT11	VT11	VT11	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22
L	VT13	VT13	VT13	VT13	VT11	VT11	VT11	VT11	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	-	-
N	VT13	VT13	VT13	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22
U	-	-	-	VT11	VT11	VT11	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22	VT22

#### Anti-intrusion grid

Ver	0282	0302	0332	0352	0502	0552	0554	0602	0604
°A	-	-	-	-	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)
E	GP3	GP4	GP4	GP4	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)
L	GP3	GP3	GP4	GP4	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)
N	GP4	GP4	GP4	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 3 (1)	GP2 x 3 (1)
U	-	-	-	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 3 (1)	GP2 x 3 (1)

(1) x \_ indicates the quantity to buy  
The accessory cannot be fitted on the configurations indicated with -

Ver	0652	0654	0682	0702	0704	0752	0754	0802	0804
°	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)
A,E	GP2 x 2 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)
L	GP2 x 2 (1)	GP2 x 2 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	-	-
N,U	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)	GP2 x 3 (1)

(1) x \_ indicates the quantity to buy

#### Device for peak current reduction

Ver	0282	0302	0332	0352	0502	0552	0554	0602	0604	0652
°A	-	-	DRENRG332N	-	DRENRG502	DRENRG552	DRENRG554	DRENRG602	DRENRG604	DRENRG652
E,L,N	DRENRG282	DRENRG302	DRENRG332N	DRENRG352	DRENRG502	DRENRG552	DRENRG554	DRENRG602	DRENRG604	DRENRG652
U	-	-	DRENRG332N	DRENRG352	DRENRG502	DRENRG552	DRENRG554	DRENRG602	DRENRG604	DRENRG652

The accessory cannot be fitted on the configurations indicated with -  
A grey background indicates the accessory must be assembled in the factory

Ver	0654	0682	0702	0704	0752	0754	0802	0804
°A,E,N,U	DRENRG654N	DRENRG682	DRENRG702	DRENRG704	DRENRG752	DRENRG754	DRENRG802	DRENRG804
L	DRENRG654N	DRENRG682	DRENRG702	DRENRG704	DRENRG752	DRENRG754	-	-

A grey background indicates the accessory must be assembled in the factory

#### Power factor correction

Ver	0282	0302	0332	0352	0502	0552	0554	0602	0604	0652
°A	-	-	RIFNRG332N	-	RIFNRG502	RIFNRG552	RIFNRG554	RIFNRG602	RIFNRG604	RIFNRG652
E,L,N	RIFNRG282	RIFNRG302	RIFNRG332N	RIFNRG352	RIFNRG502	RIFNRG552	RIFNRG554	RIFNRG602	RIFNRG604	RIFNRG652
U	-	-	RIFNRG332N	RIFNRG352	RIFNRG502	RIFNRG552	RIFNRG554	RIFNRG602	RIFNRG604	RIFNRG652

The accessory cannot be fitted on the configurations indicated with -  
A grey background indicates the accessory must be assembled in the factory

Ver	0654	0682	0702	0704	0752	0754	0802	0804
°A,E,N,U	RIFNRG654N	RIFNRG682	RIFNRG702	RIFNRG704	RIFNRG752	RIFNRG754	RIFNRG802	RIFNRG804
L	RIFNRG654N	RIFNRG682	RIFNRG702	RIFNRG704	RIFNRG752	RIFNRG754	-	-

A grey background indicates the accessory must be assembled in the factory

#### Double safety valves

Ver	0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804
°A,E,N,U	T6NRG1	T6NRG1	T6NRG1	T6NRG1	T6NRG1	T6NRG2	T6NRG2	T6NRG1	T6NRG2	T6NRG1	T6NRG2	T6NRG1	T6NRG1	T6NRG2	T6NRG1	T6NRG2	T6NRG1	T6NRG2
L	T6NRG1	T6NRG1	T6NRG1	T6NRG1	T6NRG1	T6NRG2	T6NRG2	T6NRG1	T6NRG2	T6NRG1	T6NRG2	T6NRG1	T6NRG1	T6NRG2	T6NRG1	T6NRG2	-	-

A grey background indicates the accessory must be assembled in the factory

## CONFIGURATOR

Field	Description
<b>1,2,3</b>	<b>NRG</b>
<b>4,5,6,7</b>	<b>Size</b> 0282, 0302, 0332, 0352, 0502, 0552, 0554, 0602, 0604, 0652, 0654, 0682, 0702, 0704, 0752, 0754, 0802, 0804
<b>8</b>	<b>Operating field</b>
X	Electronic thermostatic expansion valve (1)
Z	Low temperature electronic thermostatic valve (2)
<b>9</b>	<b>Model</b>
°	Cooling only
<b>10</b>	<b>Heat recovery</b>
°	Without heat recovery
D	With desuperheater (3)
T	With total recovery
<b>11</b>	<b>Version</b>
°	Standard
A	High efficiency
E	Silenced high efficiency (4)
L	Standard silenced (4)
N	Silenced very high efficiency (4)
U	Very high efficiency
<b>12</b>	<b>Coils</b>
°	Copper-aluminium
R	Copper pipes-copper fins
S	Copper pipes-Tinned copper fins
V	Copper pipes-Coated aluminium fins
<b>13</b>	<b>Fans</b>
°	Standard (5)
J	Inverter (6)
M	Oversized (7)
<b>14</b>	<b>Power supply</b>
°	400V ~ 3N 50Hz with magnet circuit breakers
<b>15,16</b>	<b>Integrated hydronic kit</b>
00	Without hydronic kit
	<b>Kit with storage tank and pump/s</b>
01	Storage tank with low head pump
02	Storage tank with low head pump + stand-by pump
03	Storage tank with high head pump
04	Storage tank with high head pump + stand-by pump
	<b>Kit with pump/s and storage tank with holes for heaters</b>
05	Storage tank with holes for heaters and single low head pump (8)
06	Storage tank with holes for heaters and pump low head + stand-by pump (8)
07	Storage tank with holes for heaters and single high head pump (8)
08	Storage tank with holes for heaters and pump high head + stand-by pump (8)
	<b>Double loop</b>
09	Double loop
	<b>Kit with pump/s</b>
P1	Single pump low head
P2	Pump low head + stand-by pump
P3	Single pump high head
P4	Pump high head + stand-by pump
	<b>Kit with inverter pump/s to fixed speed</b>
I1	Single low head pump + fixed speed inverter
I2	Single low head pump with fixed speed inverter + stand-by pump
I3	Single high head pump + fixed speed inverter
I4	Single high head pump with fixed speed inverter + stand-by pump
	<b>Kit with storage tank and inverter pump/s to fixed speed</b>
K1	Single low head pump + storage tank + fixed speed inverter
K2	Storage tank and low head pump with fixed speed inverter + stand-by pump
K3	Single high head pump + storage tank + fixed speed inverter
K4	Storage tank and low head pump with fixed speed inverter + stand-by pump
	<b>Kit with storage tank and variable speed inverter pump/s</b>
W1	Single low head pump + Storage tank + variable speed inverter
W2	Double low head pump + Storage tank + variable speed inverter
W3	Single high head pump + Storage tank + variable speed inverter
W4	Double high head pump + Storage tank + variable speed inverter

(1) Water produced from 4 °C ÷ 20 °C

(2) Water produced from 8 °C to -10 °C. The option is not compatible with hydronic kits W1-W2-W3-W4.

(3) Warning: on the recovery side, a minimum input temperature of 35°C must always be guaranteed on the heat exchanger. For more information about the unit operating range, refer to the Magellano selection program

(4) The size 0282-0302-0332-0352 only available in low noise versions.

(5) As standard in sizes from 0282 to 0352 versions E - L and in size from 0282 to 0332 version N

(6) As standard in size 0702-0704-0752-0754-0802-0804 in the version U and N.

(7) As standard in sizes from 0502 to 0804 version ° - L - A - E and in sizes from 0352 to 0682 and in sizes from 0554 to 0654 version N - U.

(8) Storage tanks with holes for supplementary heaters (not provided) are sent from the factory with plastic protection caps. Before loading the system, if the installation of one or all resistances is not expected, all plastic caps must be replaced with the special caps, commonly commercially available.

## PERFORMANCE SPECIFICATIONS

### NRG - °

Size		0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804
<b>Cooling performance 12 °C / 7 °C (1)</b>																			
Cooling capacity	kW	-	-	-	-	100,8	110,6	117,6	127,1	130,0	138,5	143,5	161,9	182,0	171,7	203,9	194,0	222,4	212,3
Input power	kW	-	-	-	-	33,4	37,8	37,8	39,7	44,2	45,1	50,7	52,5	59,4	57,4	69,6	66,5	80,4	74,8
Cooling total input current	A	-	-	-	-	59,0	64,0	59,0	68,0	79,0	77,0	91,0	88,0	95,0	108,0	111,0	117,0	127,0	126,0
EER	W/W	-	-	-	-	3,02	2,92	3,11	3,20	2,94	3,07	2,83	3,08	3,06	2,99	2,93	2,92	2,77	2,84
Water flow rate system side	l/h	-	-	-	-	17363	19059	20268	21893	22383	23841	24712	27874	31338	29554	35100	33389	38287	36547
Pressure drop system side	kPa	-	-	-	-	40	49	46	44	56	53	50	54	69	71	68	67	81	80

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

### NRG - L

Size		0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754
<b>Cooling performance 12 °C / 7 °C (1)</b>																	
Cooling capacity	kW	55,8	63,8	73,3	84,5	98,9	108,2	113,4	123,5	123,9	132,9	139,3	159,0	178,5	168,5	198,8	189,6
Input power	kW	19,7	22,1	24,4	28,6	33,9	38,6	38,5	40,9	45,2	46,7	53,6	53,5	60,3	59,0	71,8	68,2
Cooling total input current	A	32,0	41,0	45,0	55,0	58,0	63,0	59,0	68,0	79,0	77,0	92,0	88,0	96,0	107,0	112,0	117,0
EER	W/W	2,83	2,88	3,01	2,95	2,92	2,80	2,95	3,02	2,74	2,85	2,60	2,97	2,96	2,85	2,77	2,78
Water flow rate system side	l/h	9604	10989	12618	14572	17043	18647	19537	21269	21332	22880	23984	27367	30726	29004	34224	32640
Pressure drop system side	kPa	35	46	37	50	39	46	45	43	54	50	47	52	66	69	65	64

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

### NRG - A

Size		0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804
<b>Cooling performance 12 °C / 7 °C (1)</b>																			
Cooling capacity	kW	-	-	-	-	105,3	116,3	118,7	129,7	132,2	141,2	151,3	167,9	186,4	177,0	208,8	199,2	228,6	218,5
Input power	kW	-	-	-	-	31,0	34,9	37,7	40,1	43,8	45,6	47,8	51,1	57,3	56,2	67,0	64,9	77,2	73,6
Cooling total input current	A	-	-	-	-	56,0	60,0	60,0	69,0	80,0	78,0	88,0	85,0	93,0	106,0	108,0	115,0	124,0	123,0
EER	W/W	-	-	-	-	3,39	3,33	3,14	3,23	3,02	3,09	3,16	3,29	3,25	3,15	3,12	3,07	2,96	2,97
Water flow rate system side	l/h	-	-	-	-	18133	20029	20437	22332	22778	24316	26053	28900	32076	30475	35940	34279	39342	37605
Pressure drop system side	kPa	-	-	-	-	30	36	34	34	42	41	56	45	57	56	62	59	74	72

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

### NRG - E

Size		0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804
<b>Cooling performance 12 °C / 7 °C (1)</b>																			
Cooling capacity	kW	58,7	64,8	74,8	88,1	101,0	112,1	115,3	124,8	126,8	134,9	147,6	161,6	180,1	171,4	201,8	191,5	216,6	208,9
Input power	kW	18,7	21,5	23,3	27,6	31,6	35,8	38,6	40,7	45,6	46,8	49,3	52,1	59,4	58,0	70,9	67,4	81,8	77,1
Cooling total input current	A	31,0	41,0	45,0	54,0	55,0	60,0	61,0	70,0	81,0	79,0	87,0	85,0	95,0	106,0	111,0	116,0	129,0	126,0
EER	W/W	3,14	3,02	3,21	3,19	3,20	3,13	2,98	3,07	2,78	2,88	2,99	3,10	3,03	2,96	2,85	2,84	2,65	2,71
Water flow rate system side	l/h	10097	11156	12874	15166	17382	19311	19858	21482	21840	23238	25406	27822	31004	29499	34739	32965	37282	35953
Pressure drop system side	kPa	24	29	28	37	28	34	32	32	38	37	53	43	53	52	57	55	67	65

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

### NRG - U

Size		0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804
<b>Cooling performance 12 °C / 7 °C (1)</b>																			
Cooling capacity	kW	-	-	-	94,0	105,1	116,7	122,4	134,4	135,9	148,2	154,1	170,1	192,0	179,4	215,0	203,9	236,8	224,6
Input power	kW	-	-	-	26,8	30,6	34,4	36,1	38,2	41,9	42,9	46,5	49,5	57,5	56,2	66,4	63,6	75,7	72,1
Cooling total input current	A	-	-	-	53,0	57,0	61,0	58,0	68,0	78,0	76,0	87,0	83,0	92,0	106,0	106,0	114,0	120,0	121,0
EER	W/W	-	-	-	3,51	3,43	3,39	3,39	3,52	3,24	3,45	3,32	3,44	3,34	3,19	3,24	3,20	3,13	3,11
Water flow rate system side	l/h	-	-	-	16172	18095	20096	21081	23146	23408	25528	26524	29288	33054	30884	37012	35090	40762	38655
Pressure drop system side	kPa	-	-	-	24	30	28	37	38	46	36	43	47	53	58	66	59	80	72

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

### NRG - N

Size		0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804
<b>Cooling performance 12 °C / 7 °C (1)</b>																			
Cooling capacity	kW	59,7	66,0	76,0	92,0	103,0	114,9	120,1	131,5	132,9	144,6	148,5	163,6	188,0	175,9	209,5	199,0	227,4	218,5
Input power	kW	18,1	20,8	23,3	27,9	31,8	36,1	37,0	39,2	43,2	44,5	48,5	52,1	57,9	56,8	67,6	65,1	78,0	74,5
Cooling total input current	A	30,0	41,0	45,0	52,0	57,0	62,0	57,0	67,0	78,0	75,0	88,0	85,0	92,0	106,0	107,0	114,0	123,0	123,0
EER	W/W	3,29	3,17	3,26	3,30	3,24	3,18	3,25	3,35	3,07	3,25	3,06	3,14	3,25	3,10	3,10	3,06	2,92	2,93
Water flow rate system side	l/h	10270	11372	13087	15837	17726	19768	20680	22650	22893	24895	25579	28156	32351	30273	36062	34256	39138	37603
Pressure drop system side	kPa	25	31	29	23	28	26	36	36	44	34	41	44	50	56	63	57	75	68

(1) Data EN 14511:2022; Heat exchanger water (services side) 12°C / 7°C; outside air 35°C

**ENERGY INDICES (REG. 2016/2281 EU)**

Size		0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804
<b>Fans: °</b>																			
<b>SEER - 12/7 (EN14825: 2018) (1)</b>																			
SEER	°A,U	W/W	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	E	W/W	4,52	4,35	4,51	4,43	-	-	-	-	-	-	-	-	-	-	-	-	-
	L	W/W	4,25	4,17	4,39	4,28	-	-	-	-	-	-	-	-	-	-	-	-	-
	N	W/W	4,69	4,62	4,65	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Seasonal efficiency	°A,U	%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	E	%	177,70	171,11	177,59	174,38	-	-	-	-	-	-	-	-	-	-	-	-	-
	L	%	166,98	163,66	172,63	168,23	-	-	-	-	-	-	-	-	-	-	-	-	-
	N	%	184,57	181,62	183,16	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>SEER - 23/18 (EN14825: 2018) (2)</b>																			
SEER	°A,U	W/W	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	E	W/W	5,30	5,05	5,28	5,14	-	-	-	-	-	-	-	-	-	-	-	-	-
	L	W/W	4,85	4,73	5,05	4,94	-	-	-	-	-	-	-	-	-	-	-	-	-
	N	W/W	5,50	5,36	5,44	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Seasonal efficiency	°A,U	%	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	E	%	208,80	199,00	208,00	202,60	-	-	-	-	-	-	-	-	-	-	-	-	-
	L	%	190,90	186,10	198,90	194,70	-	-	-	-	-	-	-	-	-	-	-	-	-
	N	%	217,10	211,30	214,40	-	-	-	-	-	-	-	-	-	-	-	-	-	-
<b>SEPR - (EN 14825: 2018) (2)</b>																			
SEPR	°A,U	W/W	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	E	W/W	6,66	6,39	6,59	6,52	-	-	-	-	-	-	-	-	-	-	-	-	-
	L	W/W	6,34	6,26	6,43	6,30	-	-	-	-	-	-	-	-	-	-	-	-	-
	N	W/W	6,87	6,70	6,81	-	-	-	-	-	-	-	-	-	-	-	-	-	-

(1) Calculation performed with FIXED water flow rate and VARIABLE outlet temperature.  
 (2) Calculation performed with FIXED water flow rate.

Size		0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804	
<b>Fans: J</b>																				
<b>SEER - 12/7 (EN14825: 2018) (1)</b>																				
SEER	°	W/W	-	-	-	4,30	4,30	4,36	4,44	4,33	4,32	4,31	4,37	4,38	4,28	4,32	4,29	4,23	4,26	
	A	W/W	-	-	-	4,50	4,55	4,43	4,61	4,38	4,55	4,35	4,60	4,56	4,42	4,53	4,37	4,34	4,27	
	E	W/W	4,56	4,40	4,56	4,48	4,54	4,46	4,44	4,53	4,40	4,33	4,37	4,55	4,38	4,40	4,37	4,39	4,25	4,27
	L	W/W	4,29	4,21	4,43	4,32	4,32	4,24	4,35	4,30	4,33	4,23	4,31	4,28	4,24	4,30	4,23	4,30	-	-
	N	W/W	4,74	4,66	4,70	4,78	4,71	4,59	4,54	4,77	4,46	4,69	4,49	4,75	4,63	4,48	4,59	4,48	4,37	4,33
	U	W/W	-	-	-	4,77	4,73	4,77	4,51	4,68	4,44	4,72	4,51	4,82	4,66	4,44	4,64	4,42	4,50	4,30
Seasonal efficiency	°	%	-	-	-	169,07	169,11	171,47	174,48	170,14	169,96	169,32	171,68	172,37	168,37	169,62	168,51	166,33	167,34	
	A	%	-	-	-	176,81	179,08	174,25	181,27	172,29	179,03	170,93	181,13	179,44	173,98	178,17	171,94	170,64	167,83	
	E	%	179,42	172,83	179,43	176,18	178,57	175,52	174,63	178,28	173,17	170,02	171,96	179,14	172,39	172,91	171,65	172,46	166,80	167,89
	L	%	168,77	165,30	174,27	169,95	169,78	166,72	171,12	168,86	170,11	166,28	169,22	168,35	166,67	169,00	166,22	169,06	-	-
	N	%	186,54	183,37	185,00	188,02	185,24	180,46	178,48	187,81	175,31	184,43	176,70	186,89	182,33	176,32	180,67	176,26	171,95	170,07
	U	%	-	-	-	187,91	186,30	188,00	177,39	184,10	174,64	185,66	177,42	189,79	183,53	174,64	182,68	173,97	177,05	169,03
<b>SEER - 23/18 (EN14825: 2018) (2)</b>																				
SEER	°	W/W	-	-	-	4,99	4,86	5,09	5,02	5,00	4,85	5,02	4,90	4,97	4,91	4,88	4,88	4,78	4,71	
	A	W/W	-	-	-	5,27	5,18	5,28	5,27	5,23	4,92	5,10	5,22	5,20	5,15	5,12	5,02	4,90	4,74	
	E	W/W	5,34	5,10	5,33	5,19	5,20	4,92	5,24	4,99	5,22	4,69	5,10	5,07	4,82	5,09	4,61	4,99	4,74	4,68
	L	W/W	4,90	4,77	5,09	4,99	4,85	4,59	5,09	4,73	5,03	4,56	5,05	4,81	4,61	4,89	4,58	4,86	-	-
	N	W/W	5,56	5,41	5,49	5,52	5,40	5,07	5,34	5,39	5,23	5,26	5,29	5,28	5,23	5,17	5,10	5,11	4,84	4,94
	U	W/W	-	-	-	5,64	5,56	5,44	5,39	5,33	5,29	5,12	5,37	5,47	5,35	5,16	5,24	5,08	5,07	4,80
Seasonal efficiency	°	%	-	-	-	196,60	191,50	200,50	197,80	197,10	190,80	197,70	193,00	195,90	193,20	192,10	192,30	188,00	185,20	
	A	%	-	-	-	207,80	204,10	208,30	207,60	206,20	193,90	200,90	205,60	205,00	202,90	201,80	197,80	193,10	186,50	
	E	%	210,70	200,80	210,00	204,60	204,90	193,60	206,70	196,40	205,70	184,70	201,00	199,60	189,90	200,40	181,20	196,50	186,70	184,10
	L	%	192,90	187,90	200,70	196,60	191,10	180,50	200,70	186,30	198,30	179,40	199,10	189,20	181,20	192,50	180,20	191,50	-	-
	N	%	219,30	213,20	216,50	217,80	212,90	199,70	210,60	212,40	206,20	207,30	208,70	208,10	206,00	203,70	201,10	201,30	190,40	194,50
	U	%	-	-	-	222,70	219,50	214,60	212,60	210,30	208,40	201,80	211,60	215,60	210,80	203,50	206,70	200,30	199,60	189,00
<b>SEPR - (EN 14825: 2018) (2)</b>																				
SEPR	°	W/W	-	-	-	5,78	5,60	6,35	5,79	6,38	5,73	6,34	5,66	6,07	6,34	5,81	6,03	5,78	5,94	
	A	W/W	-	-	-	6,23	5,98	6,61	5,93	6,60	6,14	6,51	5,98	6,27	6,54	6,05	6,08	5,90	5,90	
	E	W/W	6,66	6,39	6,59	6,52	6,30	6,03	6,47	5,93	6,55	5,79	6,41	6,01	6,13	6,44	5,85	6,06	5,21	5,87
	L	W/W	6,34	6,26	6,43	6,30	5,86	5,68	6,35	5,73	6,47	5,69	6,47	5,64	5,95	6,28	5,72	5,92	-	-
	N	W/W	6,87	6,70	6,81	6,88	6,47	6,14	6,58	6,20	6,54	6,21	6,57	6,17	6,54	6,56	6,25	6,19	5,93	6,35
	U	W/W	-	-	-	6,73	6,43	6,14	6,73	6,18	6,68	6,51	6,73	6,26	6,34	6,68	6,18	6,30	6,10	5,99

(1) Calculation performed with FIXED water flow rate and VARIABLE outlet temperature.  
 (2) Calculation performed with FIXED water flow rate.

Size		0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804
<b>Fans: M</b>																			
<b>SEER - 12/7 (EN14825: 2018) (1)</b>																			
SEER	°	W/W	-	-	-	4,18	4,18	4,23	4,31	4,20	4,20	4,18	4,24	4,26	4,16	4,19	4,16	4,11	4,14
	A	W/W	-	-	-	4,36	4,42	4,30	4,47	4,26	4,42	4,22	4,47	4,43	4,30	4,40	4,25	4,22	4,15
	E	W/W	-	-	-	4,41	4,34	4,31	4,40	4,27	4,20	4,25	4,42	4,26	4,27	4,24	4,26	4,12	4,15
	L	W/W	-	-	-	4,19	4,12	4,22	4,17	4,20	4,11	4,18	4,16	4,12	4,18	4,11	4,18	-	-
	N	W/W	-	-	-	4,64	4,57	4,45	4,40	4,63	4,33	4,55	4,36	4,61	-	-	-	-	-
	U	W/W	-	-	-	4,63	4,60	4,64	4,38	4,54	4,31	4,58	4,38	4,68	-	-	-	-	-
Seasonal efficiency	°	%	-	-	-	164,19	164,24	166,29	169,41	164,99	165,02	164,13	166,59	167,36	163,42	164,59	163,49	161,43	162,48
	A	%	-	-	-	171,56	173,79	169,11	175,81	167,34	173,76	166,00	175,82	174,24	168,98	173,01	166,92	165,82	162,95
	E	%	-	-	-	173,34	170,47	169,31	173,05	167,98	165,00	166,82	173,83	167,44	167,75	166,62	167,42	161,90	163,00
	L	%	-	-	-	164,75	161,78	165,90	163,73	165,02	161,37	164,21	163,40	161,82	164,05	161,39	164,10	-	-
	N	%	-	-	-	182,41	179,82	175,17	173,00	182,25	170,09	178,97	171,51	181,37	-	-	-	-	-
	U	%	-	-	-	182,34	180,84	182,53	172,00	178,62	169,50	180,31	172,13	184,18	-	-	-	-	-
<b>SEER - 23/18 (EN14825: 2018) (2)</b>																			
SEER	°	W/W	-	-	-	4,86	4,73	4,94	4,89	4,86	4,71	4,87	4,77	4,84	4,77	4,74	4,75	4,64	4,58
	A	W/W	-	-	-	5,13	5,04	5,13	5,12	5,09	4,79	4,96	5,08	5,06	5,01	4,98	4,88	4,78	4,61
	E	W/W	-	-	-	5,06	4,79	5,09	4,85	5,07	4,56	4,95	4,93	4,70	4,94	4,62	4,85	4,48	4,55
	L	W/W	-	-	-	4,72	4,46	4,94	4,60	4,89	4,44	4,91	4,68	4,48	4,75	4,45	4,73	-	-
	N	W/W	-	-	-	5,37	5,25	4,93	5,19	5,24	5,08	5,12	5,14	5,14	-	-	-	-	-
	U	W/W	-	-	-	5,49	5,41	5,29	5,23	5,19	5,14	4,98	5,21	5,31	-	-	-	-	-
Seasonal efficiency	°	%	-	-	-	191,30	186,20	194,50	192,40	191,20	185,50	191,70	187,60	190,40	187,70	186,60	186,80	182,70	180,00
	A	%	-	-	-	202,10	198,50	202,20	201,70	200,40	188,50	195,30	200,00	199,40	197,20	196,30	192,20	188,00	181,20
	E	%	-	-	-	199,30	188,40	200,50	191,00	199,60	179,50	195,10	194,00	184,80	194,60	181,60	190,90	176,30	178,80
	L	%	-	-	-	185,80	175,40	194,70	181,00	192,50	174,40	193,30	184,00	176,20	187,00	175,10	186,10	-	-
	N	%	-	-	-	211,70	207,10	194,20	204,40	206,50	200,30	201,60	202,70	202,40	-	-	-	-	-
	U	%	-	-	-	216,60	213,50	208,70	206,30	204,40	202,40	196,20	205,50	209,50	-	-	-	-	-
<b>SEPR - (EN 14825: 2018) (2)</b>																			
SEPR	°	W/W	-	-	-	5,78	5,60	6,35	5,79	6,38	5,73	6,34	5,66	6,07	6,34	5,81	6,03	5,78	5,94
	A	W/W	-	-	-	6,23	5,98	6,61	5,93	6,60	6,14	6,51	5,98	6,27	6,54	6,05	6,08	5,90	5,90
	E	W/W	-	-	-	6,30	6,03	6,47	5,93	6,55	5,79	6,41	6,01	6,13	6,44	5,85	6,06	5,21	5,87
	L	W/W	-	-	-	5,86	5,68	6,35	5,73	6,47	5,69	6,47	5,64	5,95	6,28	5,72	5,92	-	-
	N	W/W	-	-	-	6,88	6,47	6,14	6,58	6,20	6,54	6,21	6,57	6,17	-	-	-	-	-
	U	W/W	-	-	-	6,73	6,43	6,14	6,73	6,18	6,68	6,51	6,73	6,26	-	-	-	-	-

(1) Calculation performed with FIXED water flow rate and VARIABLE outlet temperature.

(2) Calculation performed with FIXED water flow rate.

## ELECTRIC DATA

Size		0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804	
<b>Electric data</b>																				
Maximum current (FLA)	°	A	-	-	-	73,5	79,1	80,5	88,3	97,2	97,4	113,5	111,5	122,6	132,7	139,4	144,0	156,1	155,3	
	A	A	-	-	-	73,5	79,1	80,5	88,3	97,2	97,4	111,4	111,5	122,6	132,7	139,4	144,0	156,1	155,3	
	E	A	41,6	49,9	51,3	67,6	73,5	79,1	80,5	88,3	97,2	97,4	111,4	111,5	122,6	132,7	139,4	144,0	156,1	155,3
	L	A	40,2	49,9	53,9	67,6	73,5	79,1	80,5	88,3	97,2	97,4	113,5	111,5	122,6	132,7	139,4	144,0	-	-
	N	A	41,6	49,9	51,3	67,6	73,5	79,1	83,4	91,2	100,1	100,3	111,4	111,5	125,6	135,7	142,4	147,0	159,1	158,3
	U	A	-	-	-	67,6	73,5	79,1	83,4	91,2	100,1	100,3	111,4	111,5	125,6	135,7	142,4	147,0	159,1	158,3
Peak current (LRA)	°	A	-	-	-	276,8	282,5	200,8	329,5	221,3	338,6	268,5	396,5	407,7	287,7	601,7	347,4	618,4	358,7	
	A	A	-	-	-	276,8	282,5	200,8	329,5	221,3	338,6	226,7	396,5	407,7	287,7	601,7	347,4	618,4	358,7	
	E	A	161,9	174,0	172,3	222,6	276,8	282,5	200,8	329,5	221,3	338,6	226,7	396,5	407,7	287,7	601,7	347,4	618,4	358,7
	L	A	160,5	174,0	213,0	222,6	276,8	282,5	200,8	329,5	221,3	338,6	268,5	396,5	407,7	287,7	601,7	347,4	-	-
	N	A	161,9	174,0	172,3	222,6	276,8	282,5	203,7	332,4	224,2	341,5	226,7	396,5	410,7	290,7	604,7	350,4	621,4	361,7
	U	A	-	-	-	222,6	276,8	282,5	203,7	332,4	224,2	341,5	226,7	396,5	410,7	290,7	604,7	350,4	621,4	361,7

■ Data calculated without hydronic kit and accessories.

## GENERAL TECHNICAL DATA

Size		0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804
<b>Compressor</b>																			
Type	°A,E,N,U	Scroll																	
	L	type	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	-
Compressor regulation	°A,E,N,U	On-Off																	
	L	Type	On-Off	On-Off	On-Off	On-Off	On-Off	On-Off	On-Off	On-Off	On-Off	On-Off	On-Off	On-Off	On-Off	On-Off	On-Off	On-Off	-
Number	°A,E,N,U	no.	2	2	2	2	2	2	4	2	4	2	4	2	4	2	4	2	4
	L	no.	2	2	2	2	2	2	4	2	4	2	4	2	4	2	4	2	4
Circuits	°A,E,N,U	no.	1	1	1	1	1	1	2	1	2	1	2	1	2	1	2	1	2
	L	no.	1	1	1	1	1	1	2	1	2	1	2	1	2	1	2	1	2
Refrigerant	°A,E,N,U	R32																	
	L	type	R32	R32	R32	R32	R32	R32	R32	R32	R32	R32	R32	R32	R32	R32	R32	R32	-

Size	0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804	
<b>System side heat exchanger</b>																			
Type	°A,E,N,U	type																	
	L	Brazed plate																	
Number	°A,E,N,U	no.	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	L	no.	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
<b>System side hydraulic connections</b>																			
Sizes (in/out)	°A,E,N,U	Ø																	
	L	Ø	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2	2" 1/2

## Fans

Size	0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804	
<b>Fan</b>																			
Type	°A,E,N,U	type																	
	L	Axial																	
Number	°	no.	-	-	-	-	2	2	2	2	2	2	3	3	3	3	3	3	
	A	no.	-	-	-	-	2	2	2	2	2	3	3	3	3	3	3	3	
	E	no.	6	6	8	8	2	2	2	2	2	3	3	3	3	3	3	3	
	L	no.	4	6	6	8	2	2	2	2	2	3	3	3	3	3	3	-	-
	N	no.	6	6	8	2	2	2	3	3	3	3	3	3	3	3	3	3	3
	U	no.	-	-	-	2	2	2	3	3	3	3	3	3	3	3	3	3	3
	U	no.	-	-	-	2	2	2	3	3	3	3	3	3	3	3	3	3	3

Size	0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804
<b>Fans: °</b>																		
<b>Fan</b>																		
Air flow rate	°A,U	m³/h	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	E	m³/h	20469	20469	27112	24667	-	-	-	-	-	-	-	-	-	-	-	-
	L	m³/h	15291	20474	22212	27150	-	-	-	-	-	-	-	-	-	-	-	-
	N	m³/h	22189	22189	24655	-	-	-	-	-	-	-	-	-	-	-	-	-

### Sound data calculated in cooling mode (1)

Sound power level	°A,U	dB(A)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	E	dB(A)	73,0	73,5	74,3	74,5	-	-	-	-	-	-	-	-	-	-	-	-
	L	dB(A)	72,4	73,5	73,9	74,5	-	-	-	-	-	-	-	-	-	-	-	-
	N	dB(A)	73,0	73,9	74,3	-	-	-	-	-	-	-	-	-	-	-	-	-

(1) Sound power: calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification. Sound pressure measured in free field (in compliance with UNI EN ISO 3744).


Size	0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804
<b>Fans: M</b>																		
<b>Without Static pressure</b>																		
Air flow rate	°	m³/h	-	-	-	-	40400	40400	40400	40400	40400	40400	60600	60600	60600	60600	60600	60600
	A	m³/h	-	-	-	-	40400	40400	40400	40400	40400	60600	60600	60600	60600	60600	60600	60600
	E	m³/h	-	-	-	-	26625	26625	25488	25497	25488	25497	40270	40267	38638	38640	38638	38640
	L	m³/h	-	-	-	-	30672	30672	29318	29318	29318	29318	28069	46243	44312	44307	44312	44307
	N	m³/h	-	-	-	26623	25495	25495	40269	40274	40269	40274	38640	38634	-	-	-	-
	U	m³/h	-	-	-	40400	40400	40400	60600	60600	60600	60600	60600	-	-	-	-	-
Sound power level	°	dB(A)	-	-	-	-	86,8	87,1	86,2	87,3	86,6	87,5	86,7	89,0	89,1	88,3	89,6	89,5
	A	dB(A)	-	-	-	-	86,8	87,1	86,2	87,3	86,6	87,5	88,3	89,0	89,1	88,3	89,6	89,5
	E	dB(A)	-	-	-	-	81,3	82,1	76,1	82,7	76,7	83,1	77,8	84,2	84,4	78,0	85,6	83,6
	L	dB(A)	-	-	-	-	81,3	82,1	76,1	82,7	76,7	83,1	77,1	84,2	84,4	78,0	85,6	84,1
	N	dB(A)	-	-	-	80,3	81,3	82,1	76,9	83,6	77,5	84,0	77,8	84,2	-	-	-	-
	U	dB(A)	-	-	-	86,5	86,8	87,1	88,4	88,8	88,3	88,9	88,3	89,0	-	-	-	-

Size	0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804	
<b>Fans: J</b>																			
<b>Inverter fan</b>																			
Air flow rate	°	m³/h	-	-	-	-	36600	36600	35100	35100	35100	35100	33700	55200	53100	53100	53100	53100	
	A	m³/h	-	-	-	-	35100	35100	33800	33800	33800	33700	53100	53100	51100	51100	51100	51100	
	E	m³/h	20700	22200	27500	24800	26800	26800	25600	25600	25600	25600	40500	40500	38800	38800	38800	38800	38800
	L	m³/h	15200	20700	22200	27500	30900	30900	29500	29500	29500	29500	28300	46500	44600	44600	44600	44600	-
	N	m³/h	22200	27500	24800	26800	25600	25600	40500	40500	40500	40500	38800	38800	52317	52324	52317	52324	52317
	U	m³/h	-	-	-	35100	33700	33700	53100	53100	53100	53100	51100	51100	66361	66361	66361	66361	66361
Sound data calculated in cooling mode (1)	°	dB(A)	-	-	-	-	85,1	85,6	84,2	85,9	84,8	86,1	84,9	87,5	87,6	86,5	88,3	88,1	
	A	dB(A)	-	-	-	-	85,1	85,6	84,2	85,9	84,8	86,1	86,5	87,5	87,6	86,5	88,3	88,1	
	E	dB(A)	73,0	73,5	74,3	74,5	81,3	82,1	76,1	82,7	76,7	83,1	77,8	84,2	84,4	78,0	85,6	83,6	
	L	dB(A)	72,4	73,5	73,9	74,5	81,3	82,1	76,1	82,7	76,7	83,1	77,1	84,2	84,4	78,0	85,6	84,1	
	N	dB(A)	73,0	73,9	74,3	80,3	81,3	82,1	76,9	83,6	77,5	84,0	77,8	84,2	89,3	87,4	89,7	88,5	
	U	dB(A)	-	-	-	84,6	85,1	85,6	85,8	87,2	86,4	87,4	86,5	87,5	92,3	91,1	92,5	91,7	

(1) Sound power: calculated on the basis of measurements made in accordance with UNI EN ISO 9614-2, as required for Eurovent certification. Sound pressure measured in free field (in compliance with UNI EN ISO 3744).



## DIMENSIONS

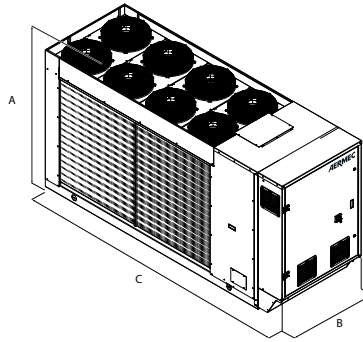

Size		0282	0302	0332	0352	0502	0552	0554	0602	0604	0652	0654	0682	0702	0704	0752	0754	0802	0804	
<b>Dimensions and weights</b>																				
A	°	mm	-	-	-	1907	1907	1907	1907	1907	1907	1907	1900	1900	1900	1900	1900	1900	1900	
	A	mm	-	-	-	1907	1907	1907	1907	1907	1907	1907	1900	1900	1900	1900	1900	1900	1900	
	E	mm	1652	1658	1658	1658	1907	1907	1907	1907	1907	1907	1900	1900	1900	1900	1900	1900	1900	
	L	mm	1652	1652	1658	1658	1907	1907	1907	1907	1907	1907	1907	1900	1900	1900	1900	1900	-	-
	N	mm	1658	1658	1658	1907	1907	1907	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
	U	mm	-	-	-	1907	1907	1907	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
B	°A	mm	-	-	-	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	
	E,N	mm	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	
	L	mm	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	-	-	
	U	mm	-	-	-	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	1100	
C	°	mm	-	-	-	3567	3567	3567	3567	3567	3567	3567	4368	4368	4368	4368	4368	4368	4368	
	A	mm	-	-	-	3567	3567	3567	3567	3567	3567	3567	4368	4368	4368	4368	4368	4368	4368	
	E	mm	2818	3317	3317	3317	3567	3567	3567	3567	3567	3567	4368	4368	4368	4368	4368	4368	4368	
	L	mm	2818	2818	3317	3317	3567	3567	3567	3567	3567	3567	4368	4368	4368	4368	4368	4368	-	-
	N	mm	3317	3317	3317	3567	3567	3567	4368	4368	4368	4368	4368	4368	4368	4368	4368	4368	4368	4368
	U	mm	-	-	-	3567	3567	3567	4368	4368	4368	4368	4368	4368	4368	4368	4368	4368	4368	

Aermec reserves the right to make any modifications deemed necessary.  
All data is subject to change without notice. Aermec does not assume responsibility or liability for errors or omissions.

**Aermec S.p.A.**  
Via Roma, 996 - 37040 Bevilacqua (VR) - Italia  
Tel. 0442633111 - Telefax 044293577  
[www.aermec.com](http://www.aermec.com)